

Cylindrical Proximity Sensor for Mobile Usage

E2AU

Designed and tested to keep your machines moving




IP69k tested and certified for highest water resistance



e1 type approval (according to automotive directive 95/54/EC)



EMC noise tested up to 100 V/m (ISO 11452-2)

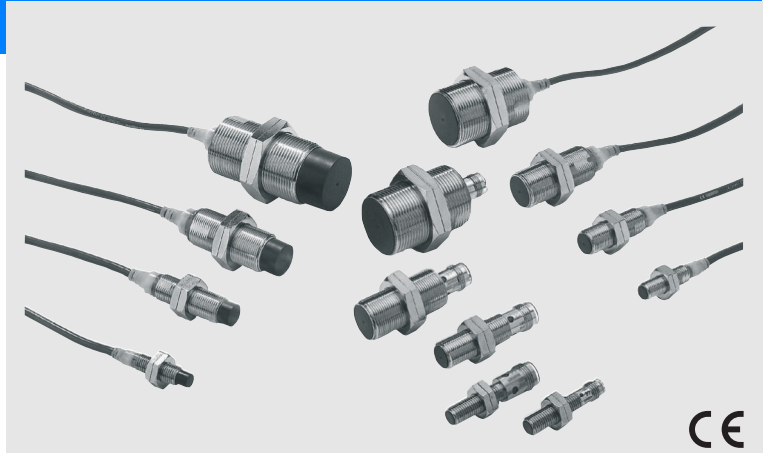

Ordering Information

DC 3-wire models

Size		Sensing distance	Connection	Body material	Thread length (overall length)	Output configuration	Operation mode NO
M12	Shielded	4.0 mm	Pre-wired	Brass	34 (50)	PNP	E2AU-M12KS04-WP-B1 2M
					56 (72)	PNP	E2AU-M12LS04-WP-B1 2M
			M12 connector	Brass	34 (48)	PNP	E2AU-M12KS04-M1-B1
					56 (70)	PNP	E2AU-M12LS04-M1-B1
M18	Shielded	8.0 mm	Pre-wired	Brass	39 (59)	PNP	E2AU-M18KS08-WP-B1 2M
					61 (81)	PNP	E2AU-M18LS08-WP-B1 2M
					M12 connector	Brass	39 (53)
			61 (75)	PNP			E2AU-M18LS08-M1-B1
				66 (86)			PNP
			M30	Shielded	15.0 mm	Pre-wired	Brass
66 (86)	PNP	E2AU-M30LS15-WP-B1 2M					
M12 connector	Brass	44 (58)				PNP	E2AU-M30KS15-M1-B1
		66 (80)				PNP	E2AU-M30LS15-M1-B1

Model Number Legend

E2A□-□□□□□□-□-□□□-□□

1 2 3 4 5 6 7 8 9 10 11 12

Example: E2A-M12LS04-M1-B1 Standard, M12, long barrel, shielded, Sn=4 mm, M12 connector, PNP-NO
 E2A-S08KN04-WP-B1 5M Standard, M8 stainless steel, short barrel, non-shielded, Sn=4 mm, pre-wired PVC cable, PNP-NO, cable length=5 m

1. Basic name

E2A

2. Sensing technology

Blank: Standard double distance

3: Triple distance

U: Mobile Usage

X: Explosion hazardous environments

3. Housing shape and material

M: Cylindrical, metric threaded, brass

S: Cylindrical, metric threaded, stainless steel

4. Housing size

08: 8 mm

12: 12 mm

18: 18 mm

30: 30 mm

5. Barrel length

K: Standard length

L: Long body

6. Shield

S: Shielded

N: Non-shielded

7. Sensing distance

Numeral: Sensing distance: e.g. 02=2 mm, 16=16 mm

8. Kind of connection

WP: pre-wired, PVC, dia 4mm (standard)

WS: pre-wired, PVC, dia 6mm

WR: pre-wired, PVC, robotic cable, dia 4mm

WA: pre-wired, PUR/PVC (PUR jacket), dia 4mm

WB: pre-wired, PUR/PVC (PUR jacket), dia 6mm

M1: M12 connector (4 pin) *

M3: M8 connector (4 pin)

M5: M8 connector (3 pin)

M1J pre-wired with M12 cable end connector (4 pin)

M3J pre-wired with M8 cable end connector (4 pin)

M5J pre-wired with M8 cable end connector (3 pin)

9. Power source and output

B: DC, 3-wire, PNP open collector

C: DC, 3-wire, NPN open collector

D: DC, 2-wire

E: DC, 3-wire, NPN voltage output

F: DC, 3-wire, PNP voltage output

10. Operation mode

1: Normally open (NO)

2: Normally closed (NC)

3: Antivalent (NO+NC)

11. Specials (e.g., cable material, oscillating frequency)

12. Cable length

Blank: Connector type

Numeral: Cable length

Note: *In case of DC 2-wire models the M12 connector identifier is '-M1G'

Specifications

DC 3-wire Models

Size		M12
Type		Shielded
Item		E2A-M12□S04-□□-B1
Sensing distance		4 mm ± 10%
Setting distance		0 to 3.2 mm
Differential travel		10% max. of sensing distance
Target		Ferrous metal (The sensing distance decreases with non-ferrous metal.)
Standard target (mild steel ST37)		12×12×1 mm
Response frequency (See note 1.)		1,000 Hz
Power supply voltage (operating voltage range)		12 to 24 VDC. Ripple (p-p): 10% max. (10 to 32 VDC)
Current consumption (DC 3-wire)		10 mA max.
Output type		PNP open collector
Control output	Load current (See note 2.)	200 mA max. (32 VDC max.)
	Residual voltage	2 V max. (under load current of 200 mA with cable length of 2 m)
Indicator		Operation indicator (Yellow LED)
Operation mode (with sensing object approaching)		-B1
Protection circuit		Output reverse polarity protection, Power source circuit reverse polarity protection, Surge suppressor, Short-circuit protection
Ambient air temperature		Operating: -40° C to 70° C, Storage: -40° C to 85° C (with no icing or condensation)
Temperature influence (See note 2.)		±10% max. of sensing distance at 23° C within temperature range of -25° C to 70° C ±15% max. of sensing distance at 23° C within temperature range of -40° C to 70° C
Ambient humidity		Operating: 35% to 95%, Storage: 35% to 95%
Voltage influence		±1% max. of sensing distance in rated voltage range ±15%
Insulation resistance		50 MΩ min. (at 500 VDC) between current carry parts and case
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current carry parts and case
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y and Z directions
Shock resistance		1,000 m/s ² , 10 times each in X, Y and Z directions
Standard and listings		IP67 after IEC 60529 IP69k after DIN 40050 EMC after EN60947-5-2 UL (CSA) E196555 (See note 3.) EMC after 95/54/EC EMC after ISO11452-2
Connection method		Pre-wired models (dia 4mm PVC cable with length = 2m). M12 connector models
Weight (packaged)	Pre-wired model	Approx. 85 g
	Connector model	Approx. 35 g
Material	Case	Brass-nickel plated
	Sensing surface	PBT
	Cable	Standard cable is PVC dia 4mm.
	Clamping nut	Brass-nickel plated

Note 1. The response frequency is an average value. Measurement conditions are as follows: standard target, a distance of twice the standard target distance between targets, and a setting distance of half the sensing distance.

2. When using any model at an ambient temperature between -40°C and -25°C and a power voltage between 30 and 32 VDC, use a load current of 100 mA max.,

3. UL (CSA) [E196555]: Use class 2 circuit only.

DC 3-wire Models / DC 4-wire

Size		M18	M30
Type		Shielded	Shielded
Item		E2A-M18□S08□□-B1	E2A-M30□S15□□-B1
Sensing distance		8 mm±10%	15 mm±10%
Setting distance		0 to 6.4 mm	0 to 12 mm
Differential travel		10% max. of sensing distance	
Target		Ferrous metal (The sensing distance decreases with non-ferrous metal.)	
Standard target (mild steel ST37)		24×24×1 mm	45×45×1 mm
Response frequency (See note 1.)		500 Hz	250 Hz
Power supply voltage (operating voltage range)		12 to 24 VDC. Ripple (p-p): 10% max. (10 to 32 VDC)	
Current consumption (DC 3-wire)		10 mA max.	
Output type		PNP open collector	
Control output	Load current (See note 2.)	200 mA max. (32 VDC max.)	
	Residual voltage	2 V max. (under load current of 200 mA with cable length of 2 m)	
Indicator		Operation indicator (Yellow LED)	
Operation mode (with sensing object approaching)		-B1	
Protection circuit		Output reverse polarity protection, Power source circuit reverse polarity protection, Surge suppressor, Short-circuit protection	
Ambient air temperature		Operating: -40° C to 70° C, Storage: -40° C to 85° C (with no icing or condensation)	
Temperature influence (See note 2.)		±10% max. of sensing distance at 23° C within temperature range of -25° C to 70° C ±15% max. of sensing distance at 23° C within temperature range of -40° C to 70° C	
Ambient humidity		Operating: 35% to 95%, Storage: 35% to 95%	
Voltage influence		±1% max. of sensing distance in rated voltage range ±15%	
Insulation resistance		50 MΩ min. (at 500 VDC) between current carry parts and case	
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min between current carry parts and case	
Vibration resistance		10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y and Z directions	
Shock resistance		1,000 m/s ² , 10 times each in X, Y and Z directions	
Standard and listings		IP67 after IEC 60529 IP69k after DIN 40050 EMC after EN60947-5-2 UL (CSA) E196555 (See note 3.) EMC after 95/94/EC EMC after ISO11452-2	
Connection method		Pre-wired models (dia 4mm PVC cable with length = 2m). M12 connector models.	
Weight (packaged)	Pre-wired model	Approx. 160 g	Approx. 280 g
	Connector model	Approx. 70 g	Approx. 200 g
Material	Case	Brass-nickel plated	
	Sensing surface	PBT	
	Cable	Standard cable is PVC dia 4mm.	
	Clamping nut	brass-nickel plated for brass models stainless steel for steel models	

Note 1. The response frequency is an average value. Measurement conditions are as follows: standard target, a distance of twice the standard target distance between targets, and a setting distance of half the sensing distance.


2. When using any model at an ambient temperature between -40°C and -25°C and a power voltage between 30 and 32 VDC, use a load current of 100 mA max.

3. UL (CSA) [E196555]: Use class 2 circuit only.

Engineering Data

Operating Range (Typical)


Shielded Models

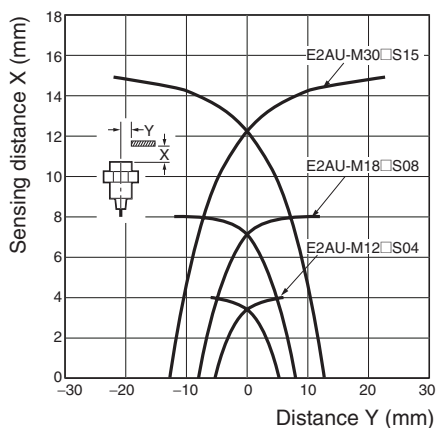


Influence of Sensing Object Size and Materials

Shielded Models


E2AU-M12-S04/ E2A-S12-S04

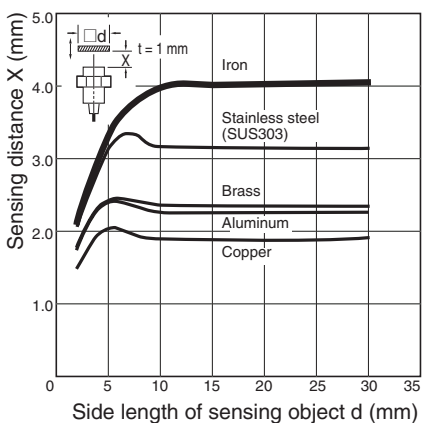

E2AU-M18-S08/E2A-S18-S08

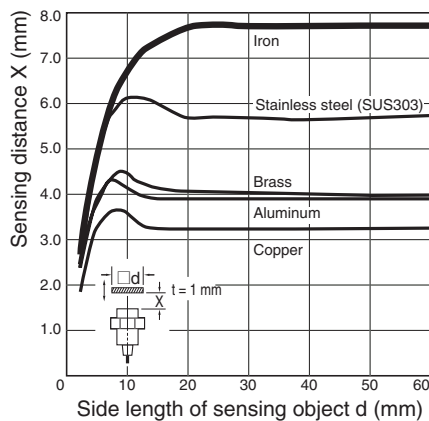


E2AU-M30-S15/ E2A-S30-S15

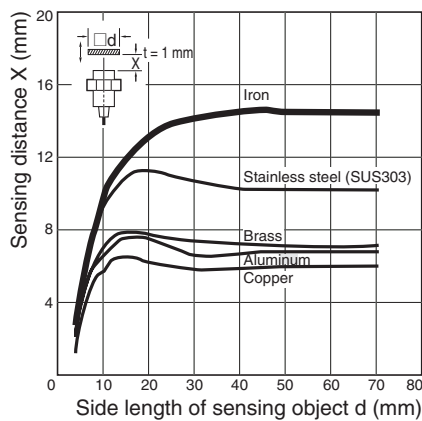


E2AU

Dimensions

Note: All units are in millimeters unless otherwise indicated.
Pre-wired Models (Shielded)




E2AU-M12KS04-WP-□□

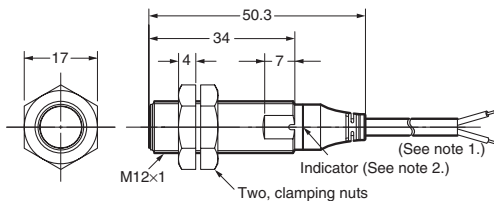


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

E2A-M12LS04-WP-□□

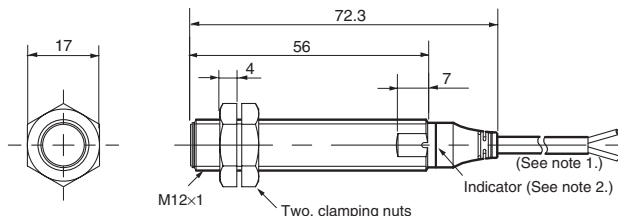


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

E2AU-M18KS08-WP-□□

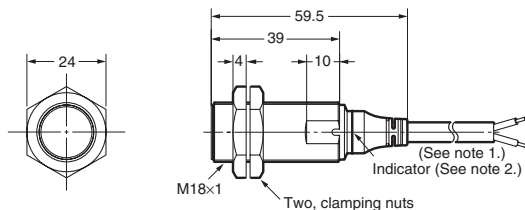


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

E2AU-M18LS08-WP-□□

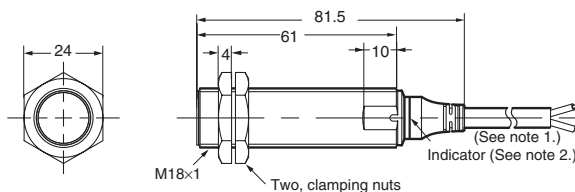


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

E2AU-M30KS15-WP-□□

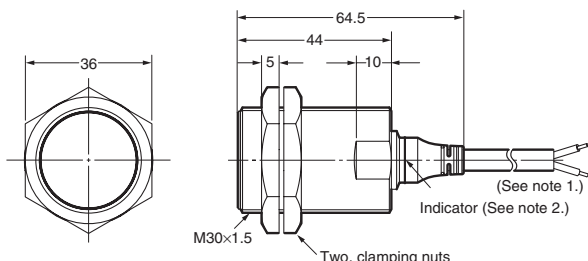

Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

E2AU-M30LS15-WP-□□

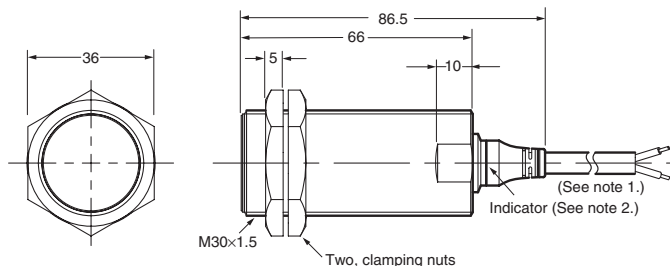


Note 1. 4-dia. vinyl-insulated round cable with 3 conductors (conductor cross section: 0.3 mm²; insulator diameter: 1.3 mm); standard length: 2 m
2. Operation indicator (yellow)

Mounting Hole Cutout Dimensions




External diameter of Proximity Sensor	Dimension F (mm)
M12	12.5 dia. ^{+0.5} / ₀
M18	18.5 dia. ^{+0.5} / ₀
M30	30.5 dia. ^{+0.5} / ₀

M12 Connector Models (Shielded)




E2AU-M12KS04-M1-□□

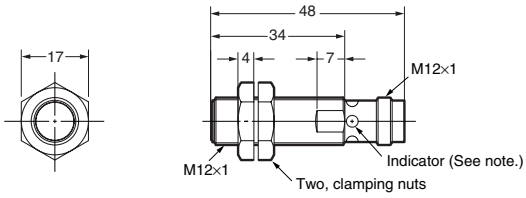


Note 1: Operation indicator (yellow LED, 4×90°)

E2AU-M12LS04-M1-□□

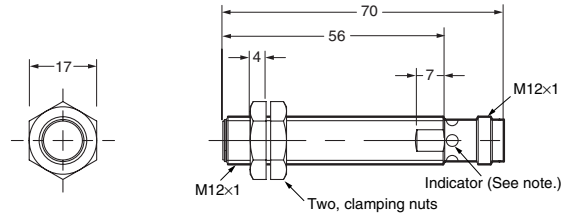


Note: Operation indicator (yellow LED, 4×90°)

E2AU-M18KS08-M1-□□

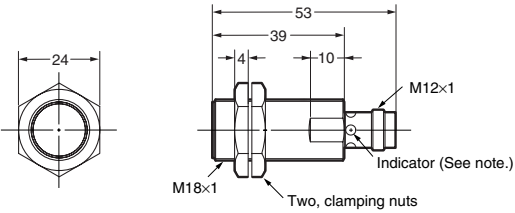


Note: Operation indicator (yellow LED, 4×90°)

E2AU-M18LS08-M1-□□

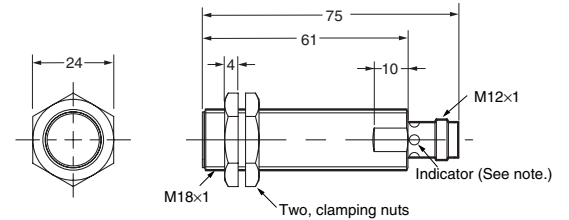


Note: Operation indicator (yellow LED, 4×90°)

E2AU-M30KS15-M1-□□

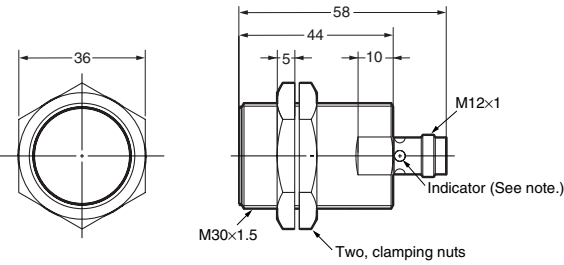

Note: Operation indicator (yellow LED, 4×90°)

E2AU-M30LS15-M1-□□

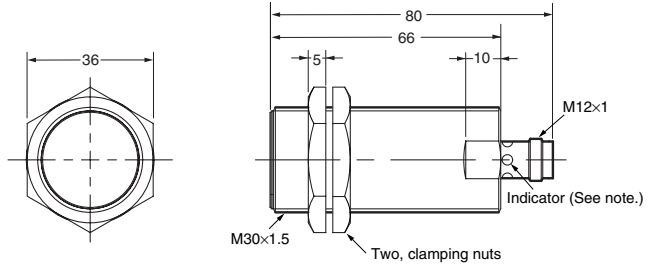

Note: Operation indicator (yellow LED, 4×90°)

Precautions

Safety Precautions

Power Supply

Do not impose an excessive voltage on the E2AU, otherwise it may be damaged. Do not impose AC current (100 to 240 VAC) on any DC model, otherwise it may be damaged.

Load Short-circuit

Do not short-circuit the load, or the E2AU may be damaged.

The E2AU's short-circuit protection function will be valid if the polarity of the supply voltage imposed is correct and within the rated voltage range.

Correct Use


Designing

Power Reset Time

The Proximity Sensor is ready to operate within 100 ms after power is supplied. If power supplies are connected to the Proximity Sensor and load respectively, be sure to supply power to the Proximity Sensor before supplying power to the load.

Effects of Surrounding Metal

When mounting the E2AU within a metal panel, ensure that the clearances given in the following table are maintained.

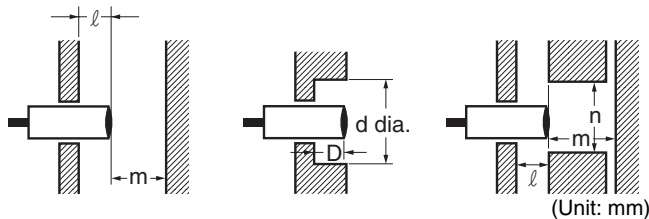

Type	Dimension	M12	M18	M30	
				Short barrel	Long barrel
Shielded	l	0	0 (See note 1.)	0 (See note 2.)	
	m	12	24	45	
	d	---	27	45	
	D	0	1.5	4	
	n	18	27	45	
Non-shielded	l	15	22	30	40
	m	20	48	70	90
	d	40	70	90	120
	D	15	22	30	40
	n	40	70	90	120

- Note 1.** In the case of using the supplied nuts.
If true flush mounting is necessary, apply a free zone of 1.5 mm.
- 2.** In the case of using the supplied nuts.
If true flush mounting is necessary, apply a free zone of 4 mm.

Wiring

Be sure to wire the E2AU and load correctly, otherwise it may be damaged.

Connection with No Load

Be sure to insert loads when wiring. Make sure to connect a proper load to the E2AU in operation, otherwise it may damage internal elements.

Do not expose the product to flammable or explosive gases.

Do not disassemble, repair, or modify the product.

Power OFF


The Proximity Sensor may output a pulse signal when it is turned OFF. Therefore, it is recommended that the load be turned OFF before turning OFF the Proximity Sensor.

Power Supply Transformer

When using a DC power supply, make sure that the DC power supply has an insulated transformer. Do not use a DC power supply with an auto-transformer.

Mutual Interference

When installing two or more Sensors face-to-face or side-by-side, ensure that the minimum distances given in the following table are maintained.

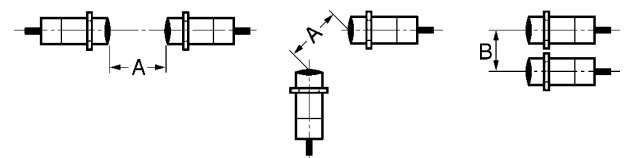

Type	Dimension	M12	M18	M30	
				Short barrel	Long barrel
Shielded	A	30	60	110	
	B	20	35	70	
Non-shielded	A	120	200	300	300
	B	100	120	200	300

E2AU

Wiring

High-tension Lines

Wiring through Metal Conduit:

If there is a power or high-tension line near the cable of the Proximity Sensor, wire the cable through an independent metal conduit to prevent against Proximity Sensor damage or malfunctioning.

Cable Extension

Standard cable length is less than 200 m.

The tractive force is 50 N.

Mounting

The Proximity Sensor must not be subjected to excessive shock with a hammer when it is installed, otherwise the Proximity Sensor may be damaged or lose its water-resistivity.

Do not tighten the nut with excessive force. A washer must be used with the nut.



Type	Torque
M12	30 Nm
M18	70 Nm
M30	180 Nm

Maintenance and Inspection

Periodically perform the following checks to ensure stable operation of the Proximity Sensor over a long period of time.

1. Check for mounting position, dislocation, looseness, or distortion of the Proximity Sensor and sensing objects.
2. Check for loose wiring and connections, improper contacts, and line breakage.
3. Check for attachment or accumulation of metal powder or dust.
4. Check for abnormal temperature conditions and other environmental conditions.
5. Check for proper lighting of indicators (for models with a set indicator.)

Never disassemble or repair the Sensor.

Environment

Water Resistivity

The Proximity Sensors are tested intensively on water resistance, but in order to ensure maximum performance and life expectancy avoid immersion in water and provide protection from rain or snow.

Operating Environment

Ensure storage and operation of the Proximity Sensor within the given specifications.

Inrush Current

A load that has a large inrush current (e.g., a lamp or motor) will damage the Proximity Sensor, in which case connect the load to the Proximity Sensor through a relay.

<SUITABILITY FOR USE>

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of the products in the customer's application or use of the products.

Take all necessary steps to determine the suitability of the product for the systems, machines, and equipment with which it will be used.

<CHANGE IN SPECIFICATIONS>

Product specifications and accessories may be changed at any time based on improvements and other reasons. Consult with your OMRON representative at any time to confirm actual specifications of purchased product.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.