

OMRON



Components Catalogue



Welcome	7 - 8
POWER RELAYS	9 - 156
Technical Information – Power & Signal Relays	9 - 28
Selection Guide	29 - 40
G5B	41 - 44
G5NB-E	45 - 48
G5SB	49 - 52
G6M	53 - 56
G6D	57 - 60
G6B	61 - 67
G2RG	68 - 71
G5Q-EU	72 - 75
G6RN	76 - 79
G5LE	80 - 84
G5LC-EU	85 - 88
G5C(E)	89 - 92
G6C	93 - 101
G2R	102 - 122
G2RL	123 - 127
G4W	128 - 132
G8P	133 - 138
G4A	139 - 142
G9EA-1	143 - 149
G9EC-1	150 - 156



SIGNAL RELAYS	157 - 273
Selection Guide	157 - 165
G5V-1	166 - 168
G2E	169 - 172
G6E	173 - 177
G6L	178 - 186
G6H	187 - 192
G6J	193 - 202
G6K	203 - 212
G6S	213 - 221
G5A	222 - 225
G5V-2	226 - 230
G6A	231 - 239
G6Y	240 - 245
G6K(U)-RF	246 - 249
G6Z	250 - 265
G6W	266 - 273



AUTOMOTIVE RELAYS	274 - 313
Selection Guide	274 - 277
G8N-1	278 - 282
G8ND-2	283 - 287
G8NW	288 - 292
G8QN	293 - 294
G8SN	295 - 296
G8SE	297 - 298
G8HN-J	299 - 304
G8HL	305 - 309
G8JN	310 - 311
G8JR	312 - 313



SOLID STATE RELAYS	314 - 347
Technical Information	314 - 318
Selection Guide	319 - 323
G3R/G3RD	324 - 327
G3M	328 - 331
G3MB	332 - 334
G3MC	335 - 339
G3S/G3SD	340 - 343
G3DZ	344 - 347



MOSFET RELAYS	348 - 433
Technical Information	348 - 351
Selection Guide	352 - 357
G3VM-61A1/D	358 - 359
G3VM-2(F)L	360 - 361
G3VM-351A/D	362 - 363
G3VM-353A/D	364 - 365
G3VM-401A/D	366 - 367
G3VM-61G1	368 - 369
G3VM-81G1	370 - 371
G3VM-201G	372 - 373
G3VM-351G	374 - 375
G3VM-353G	376 - 377
G3VM-401G	378 - 379
G3VM-61B1/E1	380 - 381
G3VM-XN(F)	382 - 384
G3VM-351B/E	385 - 386

G3VM-3(F)L	387 - 388
G3VM-353B/E	389 - 390
G3VM-401B/E	391 - 392
G3VM-4N(F)	393 - 395
G3VM-401BY/EY	396 - 397
G3VM-601BY/EY	398 - 399
G3VM-61H1	400 - 401
G3VM-201H1	402 - 403
G3VM-351H	404 - 405
G3VM-353H	406 - 407
G3VM-401H	408 - 409
G3VM-62C1/F1	410 - 411
G3VM-352C/F	412 - 413
G3VM-W(F)L	414 - 415
G3VM-354C/F	416 - 417
G3VM-355C/F	418 - 419
G3VM-402C/F	420 - 421
G3VM-62J1	422 - 423
G3VM-202J1	424 - 425
G3VM-352J	426 - 427
G3VM-354J	428 - 429
G3VM-355J	430 - 431
G3VM-402J	432 - 433



GENERAL PURPOSE RELAYS	434 - 508
Technical Information	434 - 439
Selection Guide	440 - 442
MY	443 - 455
LY	456 - 468
G2RS	469 - 478
G7L	479 - 493
G7J	494 - 502
G7SA	503 - 508



MICROSWITCHES	509 - 659
Technical Information	509 - 520
Selection Guide	521 - 530
D3V	531 - 544
V	545 - 560
VX	561 - 567
SS	568 - 575

SS-P	576 - 581
SSG	582 - 589
D2F	590 - 595
D2MQ	596 - 600
D3C	601 - 604
D2X	605 - 608
D3K	609 - 612
D3M	613 - 618
D2SW	619 - 624
D2VW	625 - 630
D2JW	631 - 635
D2HW	636 - 644
D2MC	645 - 649
D2D	650 - 657
D3D	658 - 661



DIP SWITCHES	662 - 690
Technical Information	662 - 664
Selection Guide	665 - 668
A6H	669 - 670
A6T/A6S	671 - 673
A6D/A6DR	674 - 676
A6E/A6ER	677 - 679
A6A	680 - 683
A6C/A6CV	684 - 686
A6R/A6RV	687 - 690



TACTILE SWITCHES	691 - 731
Technical Information	691 - 693
Selection Guide	694 - 698
B3F	699 - 707
B3W	708 - 711
B3FS	712 - 714
B3SN	715 - 716
B3S	717 - 718
B3WN	719 - 720
B3J	721 - 723
B3DA	724 - 725
B3D	726 - 729
B32	730 - 731



PHOTOMICROSENSORS	732 - 914
Technical Information	732 - 736
Selection Guide	737 - 738
EE-SX1107	739 - 743
EE-SX1018	744 - 746
EE-SX1108	747 - 751
EE-SX1131	752 - 756
EE-SX1139	757 - 759
EE-SX4139	760 - 762
EE-SX493	763 - 765
EE-SX1055	766 - 768
EE-SX1046	769 - 771
EE-SX1082	772 - 774
EE-SX1106	775 - 777
EE-SX1109	778 - 782
EE-SX199	783 - 785
EE-SX398/498	786 - 788
EE-SV3	789 - 791
EE-SX1071	792 - 794
EE-SX1088	795 - 797
EE-SH3	798 - 800
EE-SJ3	801 - 803
EE-SX3088/4088	804 - 806
EE-SG3	807 - 809
EE-SX1128	810 - 812
EE-SX1041	813 - 815
EE-SX1042	816 - 818
EE-SX1081	819 - 821
EE-SX1235A-P2	822 - 824
EE-SX4009-P1	825 - 827
EE-SX4019-P2	828 - 830
EE-SX3081/4081	831 - 833
EE-SX4009-P10	834 - 836
EE-SX4235A-P2	837 - 839
EE-SX1070	840 - 842
EE-SX3070/4070	843 - 845
EE-SPX415-P2	846 - 848
EE-SX461-P11	849 - 852
EE-SX414-P1	853 - 855
EE-SA102	856 - 858
EE-SA103	859 - 861

EE-SA104	862 - 864
EE-SA107-P2	865 - 867
EE-SA407-P2	868 - 870
EE-SY124	871 - 873
EE-SY125	874 - 876
EE-SY193	877 - 881
EE-SY171	882 - 884
EE-SY169B	885 - 887
EE-SY113	888 - 890
EE-SY313/413	891 - 894
EE-SF5-B	895 - 897
EE-SY110	898 - 900
EE-SY310/410	901 - 904
Z4D-B01	905 - 908
EY3A-312	909 - 911
EY3A-112	912 - 914



LEDs	915 - 921
2MDR	915 - 921

SPECIAL SENSORS	922 - 935
D6B	922 - 923
D6A-N	924 - 926
D8M-A1	927 - 928
D8M-D82	929 - 930
D6F	931 - 933
D7E	934 - 935



CONNECTORS	936 - 968
XF2E	936 - 937
XF2H	938 - 939
XF2J	940 - 941
XF2L	942 - 943
XG4M-U	944 - 946
XG4	947 - 954
XM4	955 - 957
XH2	958 - 964
XM7	965 - 968

PART NUMBER INDEX	969 - 971
--------------------------	------------------

Welcome to the Omron Components Catalogue

Omron Components is a world-class business delivering a wide range of high quality, high performance components utilising latest technologies and backed by full technical, applications and logistical support.

We offer the widest range of relays for power, signal and automotive applications as well as solid-state and MOSFET relays. Our G3VM MOSFETS combine

the advantages of mechanical and solid-state technologies allowing design flexibility with either AC or DC load able to be connected in either direction. We are also developing our range of microsensors, and currently offer photomicrosensors and a new range of D8M-D8 micro pressure-sensors which meet stringent safety standards such as working reliably with low pressure, metal casing and flange fitting. Our broad range of switches includes micro, DIP, and tactile options, and you will find a wide selection of connectors to meet

industry-standard data interconnect, power transmission and signalling. Omron Double Reflection LEDs feature built-in optical light guide technology that more than doubles effective light output compared with conventional bullet-type LEDs.



Environmental research and experience enabled us to formulate a policy to remove recognised hazardous substances from our products well within the timescales of European Directives. We have identified suitable alternative materials and agreed the changes we need to make to our production processes in order to maintain quality levels. All of our manufacturing sites have achieved ISO14001 certification for the management of environmental protection in our organisation.



Using our website alongside this catalogue, you can be kept fully up-to-date with our range of products, technical capabilities and environmental policy.

www.eu.omron.com/ocb

Omron Electronic Components Europe B.V. reserves the right to make any changes to the specifications, technical information and data of the components described in this catalogue at its sole discretion without prior notice

Although we do strive for perfection, Omron Electronic Components Europe B.V. does not warrant or make any representations regarding the correctness or accuracy of the specifications, technical information and data of the components as described in this catalogue.

■ Cautions

Use the Switch within the rated voltage and current ranges, otherwise the Switch may have a shortened life expectancy, radiate heat, or burn out. This particularly applies to the instantaneous voltages and currents when switching.


■ Correct Use

HANDLING

Operation


Do not repeatedly operate the Switch with excessive force. Applying excessive pressure or applying additional force after the plunger has stopped may deform the disc spring of the Switch, resulting in malfunction.

Be sure to set up the Switch so that the plunger will operate in a straight vertical line. A decrease in the life of the Switch may result if the plunger is pressed off-center or from an angle.



DUST PROTECTION

The Switches are not sealed and should be protected with a resin sheet as shown below when used in dust-prone environments.



PCBS

The Switch is designed for a 1.6-mm thick, single-side PCB. Using PCBs with a different thickness or using double-sided, through-hole PCBs may result in loose mounting, improper insertion, or poor heat resistance in soldering. These effects will occur, depending on the type of holes and patterns of the PCB. Therefore, it is recommended that a verification test is conducted before use.

If the PCBs are separated after mounting the Switch, particles from the PCBs may enter the Switch.

SOLDERING

General Precautions


Before soldering the Switch on a multilayer PCB, test to confirm that soldering can be performed properly. Otherwise the Switch may be deformed by the soldering heat on the pattern or lands of the multilayer PCB.

Do not solder the Switch more than twice, including rectification soldering. An interval of five minutes is required between the first and second soldering.

Automatic Soldering Baths (B3F, B3W, B3WN, B3M, B3J)


Soldering temperature: 260°C max.
Soldering time: 5 s max. for a 1.6-mm thick single-side PCB

Make sure that no flux will rise above the level of the PCB. If flux overflows onto the mounting surface of the PCB, it may enter the Switch and cause a malfunction.



Reflow Soldering (Surface Mounting) (B3FS, B3SN, B3S, B6J)

Solder the terminals within the heating curve shown in the following diagram.

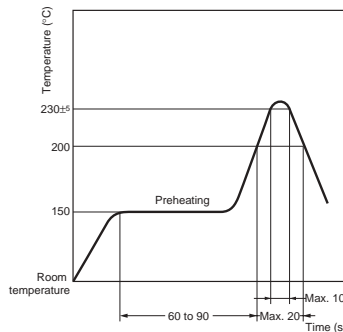

Note: The above heating curve applies if the PCB thickness is 1.6 mm.

The peak temperature may vary depending on the reflow bath used. Confirm the conditions beforehand.

Do not use an automatic soldering bath for surface-mounted Switches. The soldering gas or flux may enter the Switch and damage the Switch's push-button operation.

Manual Soldering (All Models)

Soldering temperature: 350°C max. at the tip of the soldering iron
Soldering time: 3 s max. for a 1.6-mm thick, single-side PCB

Before soldering the Switch on a PCB, make sure that there is no unnecessary space between the Switch and the PCB.

WASHING

Washable and Non-washable Models

Washable (sealed types)	B3W, B3WN, B3S, B3SN
Non-washable (Standard types)	B3F, B3FS, B3M, B3J

Standard Switches are not sealed, and cannot be washed. Doing so will cause the washing agent, together with flux or dust particles on the PCB, to enter the Switch, resulting in malfunction.

Washing Methods

Washing equipment incorporating more than one washing bath can be used to clean washable models, provided that the washable models are cleaned for one minute maximum per bath and the total cleaning time does not exceed three minutes.

Washing Agents

Apply alcohol-based solvents to clean washable models. Do not apply any other agents or water to clean any washable model, as such agents may degrade the materials or performance of the Switch.

Washing Precautions

Do not impose any external force on washable models while washing.


Do not clean washable models immediately after soldering. The cleaning agent may be absorbed into the Switch through respiration as the Switch cools. Wait for at least three minutes after soldering before cleaning washable models.

Do not use Sealed Switches while submersed in water or in locations exposed to water.

SWITCH PACKAGING (TAPING SPECIFICATION MODELS)

RADIAL TYPES

The tape is packaged by fan-folding into the box, as shown in the following diagram.




Model	A	B	C
B3F	50 mm	325 mm	275 mm
B3WN	53 mm	326 mm	350 mm

Do not apply any external force to the packaging box, or subject it to vibration. Doing so may deform the Switch terminals.

Remove the tape slowly, making sure that the Switches are not entangled or caught. Otherwise the terminals may be deformed.

Do not store the packaged Switches in locations subject to high temperatures or high humidity. The packaging boxes are sealed with paper tape and are not airtight. Storing the packaged Switches in locations with high temperature or high humidity may result in deterioration of the tape and Switches, and long-term storage under such conditions may cause discoloration of the Switch terminals.

Switching Specifications for Embossed Tape (B3FS-1000P/-1002P, B3SN)


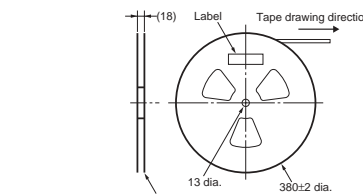


Model	A
B3FS-1000P	3.9 mm
B3FS-1002P	
B3SN	3.6 mm

Standards	Conforms to JEITA.
Package	3,000 Switches
Heat resistance	50°C for 24 hours (without deformation)



Note: Switches with ground terminals are packaged with the ground terminal on the opposite side of the guide hole.

B3FS-1010P

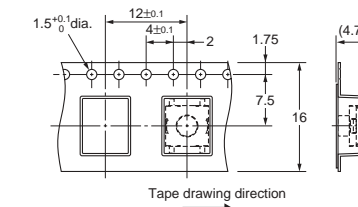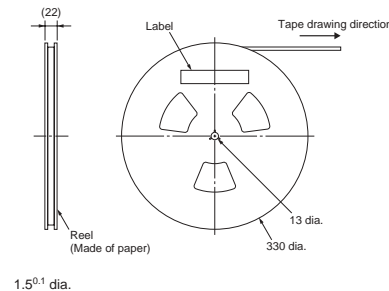




Standards	Conforms to JEITA.
Package	1,000 Switches
Heat resistance	60°C for 24 hours (without deformation)

B3FS-1050P

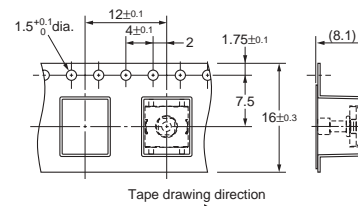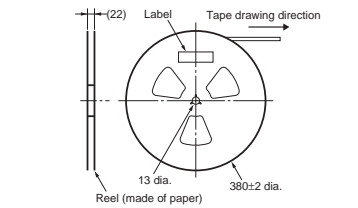

Standards	Conforms to JEITA.
Package	1,000 Switches
Heat resistance	60°C for 24 hours (without deformation)

B3S

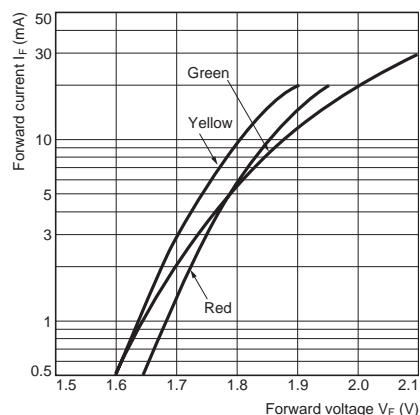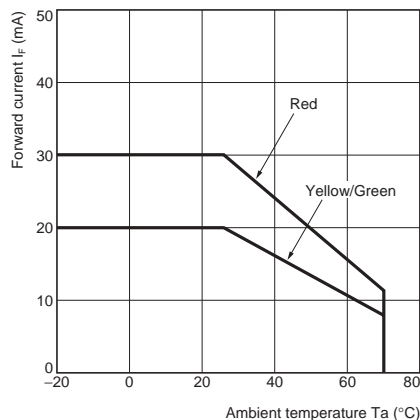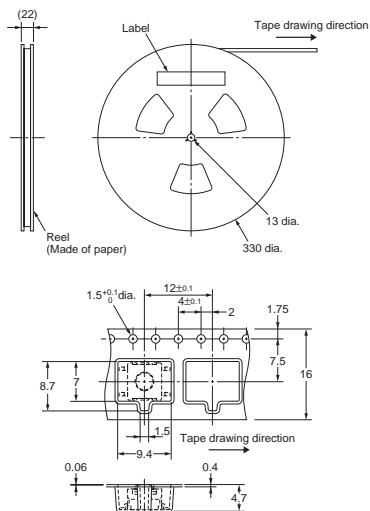

Standards	Conforms to JEITA.
Package	1,000 Switches
Heat resistance	50°C for 24 hours (without deformation)


Note: Switches with ground terminals are packaged with the ground terminal on the opposite side of the guide hole.

LEDs (B3J)

Make sure that the polarity of the LEDs is correct. The polarity is not indicated on the Switch, but the positive pole is located on the back surface of the Switch on the side without the OMRON mark.

Connect limiting resistors to the LEDs. The Switch does not have built-in limiting resistors, so satisfy the LED characteristics by obtaining the limiting resistance according to the following formula based on the voltage to be used.

$$\text{Limiting resistance (R)} = \frac{\text{Voltage used (E)} - \text{LED forward voltage (V}_F\text{)}}{\text{LED forward current (I}_F\text{)}} \quad (\Omega)$$






Item		Standard Switches										
Model		B3F										
Size		6 x 6 mm										
Appearance												
		Standard	Long life expectancy	High reliability	Vertical type							
Features		Wide range of models, including 6 x 6 mm, 12 x 12 mm, vertical, and high-force types.										
Contact		Silver-plated			Silver-plated		Silver-plated	Gold-plated	Silver-plated			
		0.98 N {100 gf}	1.47 N {150 gf}	2.55 N {260 gf}	1.27 N {130 gf}	2.55 N {260 gf}	1.27 N {130 gf}	1.27 N {130 gf}	0.98 N {100 gf}	1.47 N {150 gf}	2.55 N {260 gf}	
Type	Plunger	Operating force										
Flat type (height: 3.1mm)	Without ground	-	-	-	-	-	-	-	-	-	-	-
	With ground	-	-	-	-	-	-	-	-	-	-	-
Flat type (height 4.3 mm) (vertical model: 3.15 mm)	Without ground	B3F-1000	B3F-1002	B3F-1005	B3F-4000	B3F-4001	B3F-5000	B3F-5001	-	-	-	-
	With ground	B3F-1100	B3F-1102	B3F-1105	B3F-4100	B3F-4105	B3F-5100	B3F-5101	B3F-3100	B3F-3102	B3F-3105	-
Flat type (height 5.0 mm) (vertical model: 3.85 mm)	Without ground	B3F-1020	B3F-1022	B3F-1025	-	-	-	-	-	-	-	-
	With ground	B3F-1120	B3F-1122	B3F-1125	-	-	-	-	B3F-3120	B3F-3122	B3F-3125	-
Flat type and others	Without ground	-	-	-	-	-	-	-	-	-	-	-
	With ground	B3F-1110	-	-	-	-	-	-	-	-	-	-
Projected type (height 7.3 mm) (vertical model: 6.15 mm)	Without ground	B3F-1050	B3F-1052	B3F-1055	B3F-4050	B3F-4055	B3F-5050	B3F-5051	-	-	-	-
	With ground	B3F-1150	B3F-1152	B3F-1155	B3F-4155	B3F-5155	B3F-5150	B3F-5151	B3F-3150	B3F-3152	B3F-3155	-
Life expectancy (operations)		1,000,000	300,000	100,000	3,000,000	1,000,000	10,000,000	10,000,000	1,000,000	300,000	100,000	-
Enclosure rating		None (IP00)										
Cleaning		Not possible										
Packaging	Bag (standard)	100			100			100				
	Box (standard)	1,500			500			1,500				
	Embossed tape (model number: P suffix)	-			-			-				
Key top (for projected type)	4 x 4mm	B32-10□0			-			B32-10□0				
	9 x 9mm	-			B32-12□0			-				
	12 x 12mm	-			B32-13□0			-				
	Diameter: 9.5mm	-			B32-16□0			-				
Page		699										

Note: The colour is indicated in □ models for key tops.

Selection Guide – Tactile Switches



OMRON

Item	Standard Switches		Sealed Switches					
Model	B3F-6		B3W					
Size	6 x 6 mm		6 x 6 mm		12 x 12 mm			
Appearance								
	Radial taped type							
Features	Can be used with general-purpose radial taping parts insertion machines		Sealed construction that allows immersion cleaning after soldering. Dust-proof for application in adverse environments.					
Contact	Silver-plated		Silver-plated		Silver-plated			
	Plunger	Operating force	0.98 N {100 gf}	1.47 N {150 gf}	1.57 N {160 gf} max.	2.26 N {230 gf} max.	1.96 N {200 gf} max.	3.43 N {350 gf} max.
Type	Flat type (height: 3.1mm)	Without ground	–	–	–	–	–	–
		With ground	–	–	–	–	–	–
	Flat type (height 4.3 mm) (vertical model: 3.15 mm)	Without ground	B3F-6000	B3F-6002	B3W-1000	B3W-1002	B3W-4000	B3W-4002
		With ground	B3F-6100	B3F-6102	B3W-1100	B3W-1102	B3W-4100	B3W-4102
	Flat type (height 5.0 mm) (vertical model: 3.85 mm)	Without ground	B3F-6020	B3F-6022	–	–	–	–
		With ground	B3F-6120	B3F-6122	–	–	–	–
	Flat type and others	Without ground	–	–	–	–	–	–
		With ground	–	–	–	–	–	–
	Projected type (height 7.3 mm) (vertical model: 6.15 mm)	Without ground	B3F-6050	B3F-6052	B3W-1050	B3W-1052	B3W-4050	B3W-4052
		With ground	B3F-6150	B3F-6152	B3W-1150	B3W-1052	B3W-4150	B3W-4052
	Life expectancy (operations)	1,000,000		300,000	1,000,000	300,000	3,000,000	1,000,000
	Enclosure rating	None (IP00)		Equivalent to IP64				
Cleaning	Not possible		Possible					
Packaging	Bag (standard)	–	100		100			
	Box (standard)	1,000 (radial taped)	1,500		500			
	Embossed tape (model number: P suffix)	–	–		–			
Key top (for projected type)	4 x 4mm	B32-10□0	B32-10□0		–			
	9 x 9mm	–	–		B32-12□0			
	12 x 12mm	–	–		B32-13□0			
	Diameter: 9.5mm	–	–		B32-16□0			
Page	699		708					

Note: The colour is indicated in □ models for key tops.

Selection Guide – Tactile Switches



OMRON

Item	SMD Switches					
Model	B3FS		B3SN			
Size	6 x 6 mm					
Appearance						
Features	Surface-mounting Switches ideal for high-density mounting.		Sealed construction conforming to IP64.			
Contact	Silver-plated		Silver-plated			
	Plunger	Operating force	0.98 N {100 gf} max.	1.47 N {150 gf} max.	1.57 N {160 gf} max.	
Type	Flat type (height: 3.1mm)	Without ground	B3FS-1000	B3FS-1002	B3FS-3012	
		With ground	–	–	B3FS-3112	
	Flat type (height 4.3 mm) (vertical model: 3.15 mm)	Without ground	B3FS-1010	B3FS-1012	–	
		With ground	–	–	–	
	Flat type (height 5.0 mm) (vertical model: 3.85 mm)	Without ground	–	–	–	
		With ground	–	–	–	
	Flat type and others	Without ground	–	–	–	
		With ground	–	–	–	
	Projected type (height 7.3 mm) (vertical model: 6.15 mm)	Without ground	B3W-1050	B3W-1052	–	
		With ground	–	–	–	
	Life expectancy (operations)	1,000,000		300,000	100,000	
	Enclosure rating	None (IP00)		Equivalent to IP64		
Cleaning	Not possible		Possible			
Packaging	Bag (standard)	100	100			
	Box (standard)	1,500	1,500			
	Embossed tape (model number: P suffix)	Refer to precautions page	3,000 per reel			
Key top (for projected type)	4 x 4mm	B32-10□0	–			
	9 x 9mm	–	–			
	12 x 12mm	–	–			
	Diameter: 9.5mm	–	–			
Page	712		715			

Note: The colour is indicated in □ models for key tops.

Selection Guide – Tactile Switches

OMRON




Item	SMD Switches		Double-sealed Switches		
Model	B3S		B3WN		
Size	6 x 6 mm		6 x 6 mm		
Appearance					
Features	Surface-mounting Tactile Switch for high-density packaging.		Double-sealed construction ensures water-tight and dust-tight performance. Conforms to IP67.		
Contact	Silver-plated		Silver-plated		
Type	Plunger	Operating force	1.57 N {160 gf} max.	2.25 N {230 gf} max.	
Non-illuminated type	Flat type (height: 3.1mm)	Without ground	B3S-1000	B3S-1002	
		With ground	B3S-1100	B3S-1002	
	Flat type and others	Without ground	–	–	B3WN-6002(S)
		With ground	–	–	–
Illuminated type	Red LED	Without ground	–	–	
	Green LED	With ground	–	–	
	Yellow LED	Without ground	–	–	
Durability	500,000		300,000	100,000	
Enclosure rating	Equivalent to IP64		Equivalent to IP67		
Cleaning	Possible				
Packaging	Bag (standard)	100		–	
	Box (standard)	1,500		1,000 (radial taped)	
	Embossed tape (model number: P suffix)	1,000 per reel		–	
Key top (for projected type)	4 x 4mm	–		–	
	9 x 9mm	–		–	
	12 x 12mm	–		–	
	Diameter: 9.5mm	–		–	
Page	717		719		

Note: 1: The color is indicated in □ models for key tops.

2: The □ in B3J models contains the number indicating the color of the hinged button.

Selection Guide – Tactile Switches

OMRON


Item	Hinge Switches	Dome Arrays	Dome Arrays		
Model	B3J	B3DA	B3D		
Size	12 x 18 mm	–	4 mm dia.	5 mm dia.	
Appearance					
Features	Hinged Tactile Switch	Superior dust-tight performance.	Single-Key type added to series of B3DA Ultra-low Profile Dome Array		
Contact	Silver-plated	Silver-plated	Stainless Steel		
Type	Plunger	Operating force	1.27 N {130 gf}	1.57 N {160 gf} max.	
Non-illuminated type	Flat type (height: 3.1mm)	Without ground	–	–	
		With ground	–	–	
	Flat type and others	Without ground	B3J-1□00	–	–
		With ground	–	–	–
Illuminated type	Red LED	Without ground	B3J-2□00	–	
	Green LED	With ground	B3J-4□00	–	
	Yellow LED	Without ground	B3J-3□00	–	
Durability	3,000,000		500,000 to 1,000,000	500,000	
Enclosure rating	None (IP00)				
Cleaning	Not possible				
Packaging	Bag (standard)	–		–	
	Box (standard)	300		–	
	Embossed tape (model number: P suffix)	–		–	
Key top (for projected type)	4 x 4mm	–		–	
	9 x 9mm	–		–	
	12 x 12mm	–		–	
	Diameter: 9.5mm	–		–	
Page	721		725	726	

Note: 1: The color is indicated in □ models for key tops.

2: The □ in B3J models contains the number indicating the color of the hinged button.



A Wide Range of Models: 6 x 6 mm, 12 x 12 mm, Vertical, and High-force.

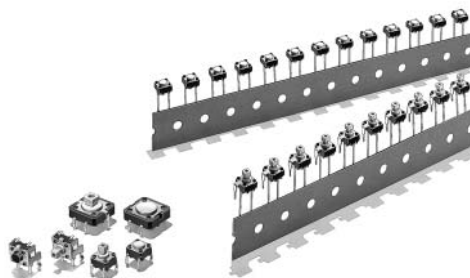- A positive click action plus a long life equal to that of a no-contact switch.
- Radial models (taping specifications) that allow the use of general-purpose radial taping parts insertion machines have been added to the series.





Ordering Information

6 x 6 mm Models

Type	Plunger	Height	Operating force (of)	Bags (100 Switches)	
				Without ground terminal	Without ground terminal
Horizontal (B3F-1000)		4.3 mm	0.98 N {100 gf}	B3F-1000	B3F-1100
			1.47 N {150 gf}	B3F-1002	B3F-1102
			2.55 N {260 gf}	B3F-1005	B3F-1105
			4.9 N {50 gf}	B3F-1006 (See note.)	–
		5.0 mm	0.98 N {100 gf}	B3F-1020	B3F-1120
			1.47 N {150 gf}	B3F-1022	B3F-1122
			2.55 N {260 gf}	B3F-1025	B3F-1125
			4.9 N {50 gf}	B3F-1026 (See note.)	–
	5.0 mm (7.5-mm pitch)	0.98 N {100 gf}	–	B3F-1110	
	7.0 mm	0.98 N {100 gf}	B3F-1060 (See note.)	–	
		1.47 N {150 gf}	B3F-1062 (See note.)	–	
	9.5 mm	0.98 N {100 gf}	B3F-1070 (See note.)	–	
		1.47 N {150 gf}	B3F-1072-N (See note.)	–	
		2.55 N {260 gf}	B3F-1075 (See note.)	–	
		4.9 N {50 gf}	B3F-1056 (See note.)	–	
		7.3 mm	0.98 N {100 gf}	B3F-1050	B3F-1150
1.47 N {150 gf}			B3F-1052	B3F-1152	
2.55 N {260 gf}			B3F-1055	B3F-1155	
4.9 N {50 gf}			B3F-1056 (See note.)	–	

6 x 6 mm Models

Type	Plunger	Height	Operating force (of)	Bags (100 Switches)	
				Without ground terminal	Without ground terminal
Horizontal (B3F-3000)		3.15 mm	0.98 N {100 gf}	–	B3F-3100
			1.47 N {150 gf}	–	B3F-3102
			2.55 N {260 gf}	–	B3F-3105
		3.85 mm	0.98 N {100 gf}	–	B3F-3120
			1.47 N {150 gf}	–	B3F-3122
			2.55 N {260 gf}	–	B3F-3125
		6.15 mm	0.98 N {100 gf}	–	B3F-3150
			1.47 N {150 gf}	–	B3F-3152
			2.55 N {260 gf}	–	B3F-3155

Note: Switches are sold in units of 100 Switches. Orders must be made in multiples of 100 (the quantity per bag).

12 x 12 mm Models

Type	Plunger or LED colour	Height	Operating force	Bags (100 Switches)	
				Without ground terminal	Without ground terminal
Standard (B3F-4000)	Flat	4.3 mm	1.27 N {130 gf}	B3F-4000	B3F-4100
			2.55 N {260 gf}	B3F-4005	B3F-4105
	Projected	7.3 mm	1.27 N {130 gf}	B3F-4050	B3F-4150
			2.55 N {260 gf}	B3F-4055	B3F-4155
Long life expectancy (B3F-5000)	Flat	4.3 mm	1.27 N {130 gf}	B3F-5000	B3F-5100
	Projected	7.3 mm		B3F-5050	B3F-5150
High reliability gold-plated (B3F-5000)	Flat	4.3 mm	1.27 N {130 gf}	B3F-5001	B3F-5101
	Projected	7.3 mm		B3F-5051	B3F-5151

Note: Switches are sold in units of 100 Switches. Orders must be made in multiples of 100 (the quantity per bag).

6 x 6 mm Radial Models (Taping Specifications)

Type	Plunger	Height	Operating force 0.98 N {100 gf}		Operating force 1.47 N {150 gf}	
			Without ground terminal	With ground terminal	Without ground terminal	With ground terminal
Standard (B3F-4000)	Flat	4.3 mm	B3F-6000	B3F-6100	B3F-6002	B3F-6102
		5.0 mm	B3F-6020	B3F-6120	B3F-6022	B3F-6122
	Projected	7.3 mm	B3F-6050	B3F-6150	B3F-6052	B3F-6152

Note: Switches are sold in units of 1,000 Switches. Orders must be made in multiples of 1,000. Switches are not sold individually.

■ Accessories (Order Separately)

Special Key Tops are available for projected plunger models.

Specifications

■ Rating/Characteristics


Switching capacity	1 to 50 mA, 5 to 24 VDC (resistive load)
Ambient temperature	-25°C to 70°C (with no icing)
Ambient humidity	35% to 85%
Contact form	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) max. Malfunction: 100 m/s ² (approx. 10G) max.
Life expectancy	B3F-1000, B3F-3000, B3F-6000: 1,000,000 operations min (OF: 0.98 N) (B3F-1070: 500,000 operations min) 300,000 operations min (OF: 1.47 N) 100,000 operations min (OF: 2.55 N) 50,000 operations min (OF: 4.9 N) B3F-4000: 3,000,000 operations min (OF: 1.28 N) 1,000,000 operations min (OF: 2.55 N) B3F-5000: 10,000,000 operations min.
Weight	6 x 6 mm models: approx. 0.25 g 12 x 12 mm models (standard types): approx. 0.85 g Radial models: approx. 0.25 g

■ Operating Characteristics


Operating force (OF)	B3F-1000, B3F-3000, B3F-6000				B3F-4000, B3F-5000	
	0.98 N	1.47 N	2.55 N	4.9 N	1.27 N	2.55 N
	B3F-1□□□ B3F-3□□□ B3F-6□□□	B3F-1□□□2 B3F-3□□□2 B3F-6□□□2	B3F-1□□□5 B3F-3□□□5	B3F-10□□6	B3F-4□□□□ B3F-5□□□□	B3F-4□□□5
Operating force (OF)	0.98±0.29 N {100±30 gf}	1.47±0.49 N {150±50 gf}	2.55±0.69 N {260±70 gf}	4.9±1.47N {100±30 gf}	1.27±0.49 N {130±50 gf}	2.55±0.69 N {260±70 gf}
Relapsing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.	0.49 N {50 gf} min.	0.7 N {70 gf} min.	0.29 N {30 gf} min.	0.49 N min. {50 gf}
Pretravel (PT)	0.25 ^{+0.2} / _{-0.1} mm				0.3 ^{+0.2} / _{-0.1} mm	

Engineering Data

Operating Force vs. Stroke (Typical)
B3F-1000, -3000, -6000

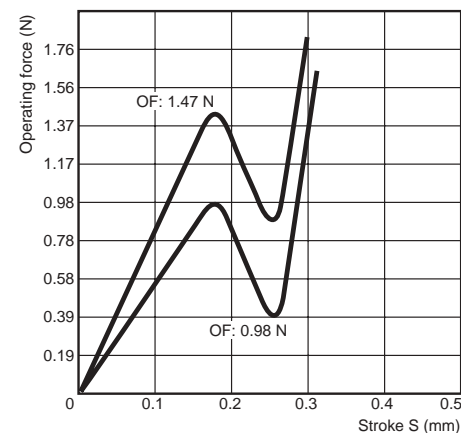

B3F-4000, -5000

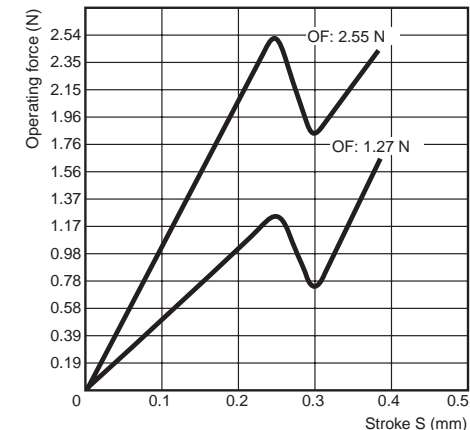

Dimensions

Note 1. All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.


2. No terminal numbers are indicated on the Switches. The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram below. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up.



6 x 6 mm Models

Horizontal, Flat Plunger Type (without Ground Terminal)


B3F-1000, B3F-1002, B3F-1005, B3F-1006
B3F-1020 (See note.), B3F-1022 (See note.),
B3F-1025 (See note.), B3F-1026 (See note.)

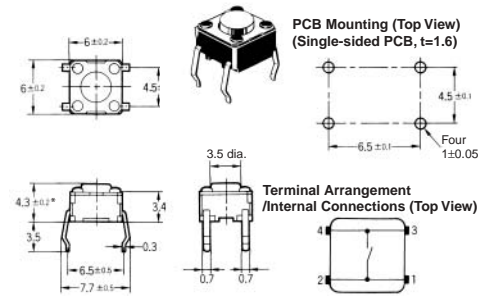

* The height of B3F-1020, B3F-1022, B3F-1025, and B3F-1026 is 5 ± 0.2 mm.

Horizontal, Flat Plunger Type (with Ground Terminal, Pitch: 6.5 mm)


B3F-1100, B3F-1102, B3F-1105
B3F-1120 (See note.), B3F-1122 (See note.),
B3F-1125 (See note.)

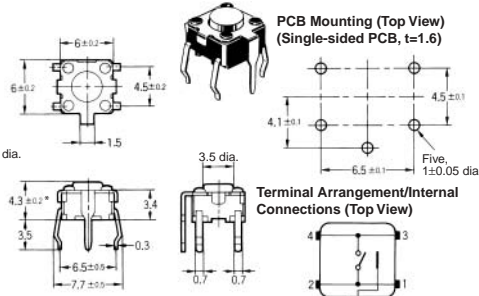

* The height of B3F-1120, B3F-1122, and B3F-1125 is 5 ± 0.2 mm.


Horizontal, Flat Plunger Type (with Ground Terminal, Pitch: 7.5 mm)

B3F-1110

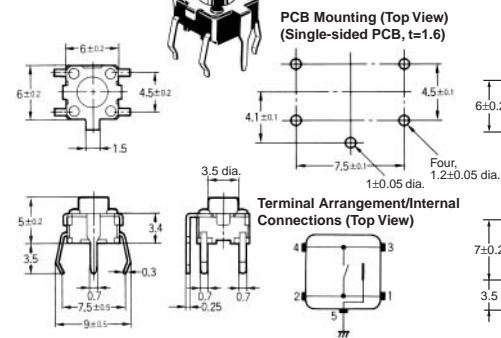


Horizontal, Flat Plunger Type (without Ground Terminal)

B3F-1060, B3F-1062

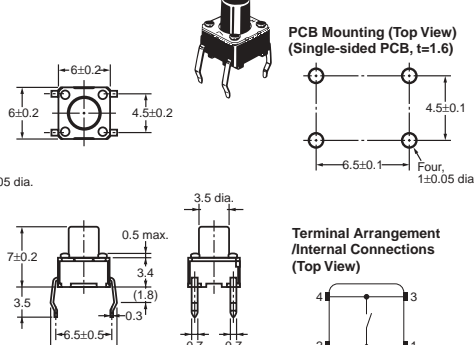


Horizontal, Flat Plunger Type (without Ground Terminal)

B3F-1070, B3F-1072-N, B3F-1075

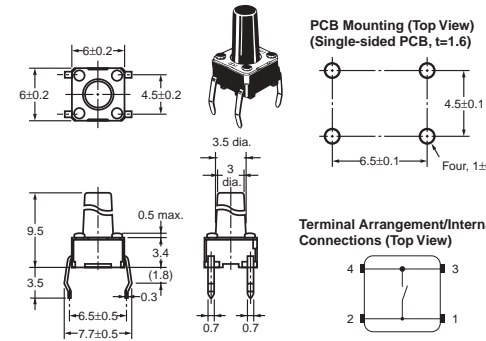


Horizontal, Projected Plunger Type (without Ground Terminal)

B3F-1050, B3F-1052
B3F-1055, B3F-1056

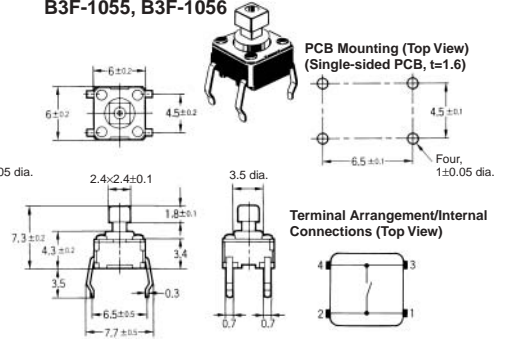


Horizontal, Projected Plunger Type (with Ground Terminal)

B3F-1150, B3F-1152, B3F-1155

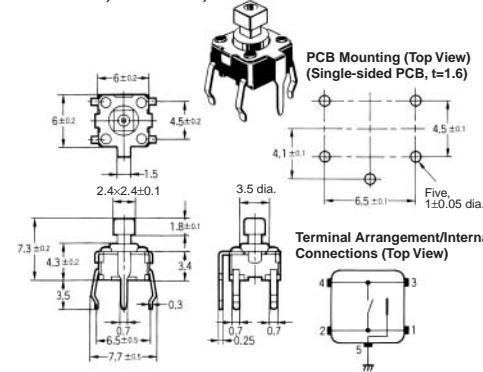


Vertical, Flat Plunger Type

B3F-3100, B3F-3102, B3F-3105

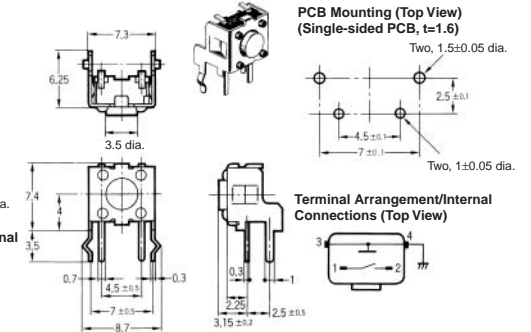


Vertical, Flat Plunger Type (Height: 3.85 mm)

B3F-3120, B3F-3122, B3F-3125

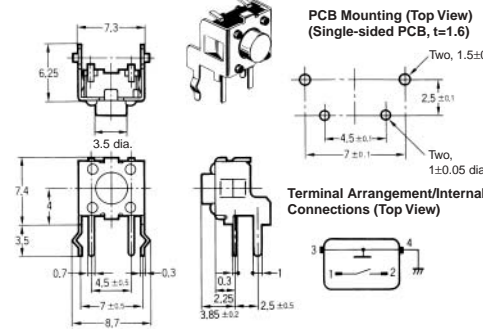

Vertical, Projected Plunger Type

B3F-3150, B3F-3152, B3F-3155

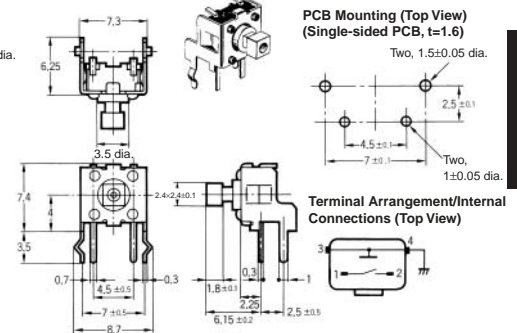


12 x 12 mm Models

Flat Plunger Type (without Ground Terminal)

B3F-4000, B3F-4005, B3F-5000, B3F-5001



PCB Mounting (Top View) (Single-sided PCB, t=1.6)






Flat Plunger Type (with Ground Terminal)


B3F-4100, B3F-4105, B3F-5100, B3F-5101






PCB Mounting (Top View) (Single-sided PCB, t=1.6)



Terminal Arrangement/Internal Connections (Top View)



Terminal Arrangement/Internal Connections (Top View)




Projected Plunger Type (without Ground Terminal)

B3F-4050, B3F-4055, B3F-5050, B3F-5051



PCB Mounting (Top View) (Single-sided PCB, t=1.6)






Projected Plunger Type (with Ground Terminal)


B3F-4150, B3F-4155, B3F-5150, B3F-5151






PCB Mounting (Top View) (Single-sided PCB, t=1.6)



Terminal Arrangement/Internal Connections (Top View)





Terminal Arrangement/Internal Connections (Top View)



6 mm x 6 mm Radial Types (Taping Specifications): Sold in Units of 1,000 Switches

Flat Plunger Type (without Ground Terminal) B3F-6000, B3F-6002




PCB Mounting (Top View) (Single-sided PCB, t=1.6)




Terminal Arrangement/Internal Connections (Top View)




Note: The tape is random between surface A and surface B.




Flat Plunger Type (with Ground Terminal) B3F-6100, B3F-6102





PCB Mounting (Top View) (Single-sided PCB, t=1.6)




Terminal Arrangement/Internal Connections (Top View)




Flat Plunger Type (without Ground Terminal) B3F-6020, B3F-6022






PCB Mounting (Top View) (Single-sided PCB, t=1.6)




Terminal Arrangement/Internal Connections (Top View)




Note: The tape is random between surface A and surface B.

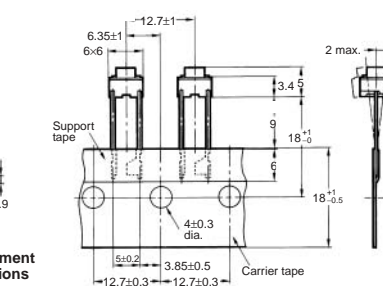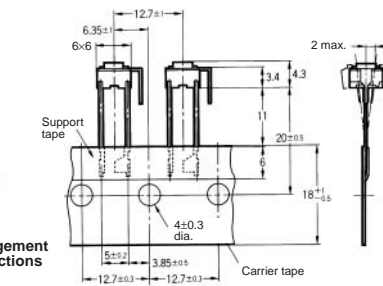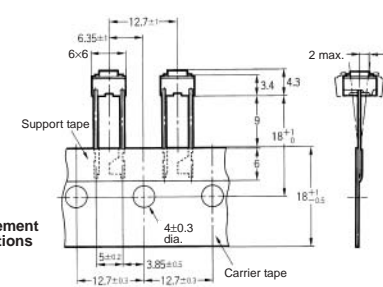

**Flat Plunger Type
(with Ground Terminal)**
B3F-6120, B3F-6122

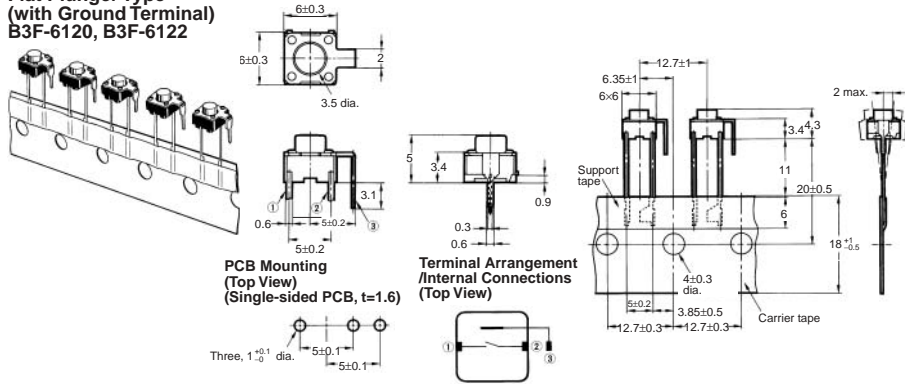


**Projected Plunger Type
(without Ground Terminal)**
B3F-6050, B3F-6052

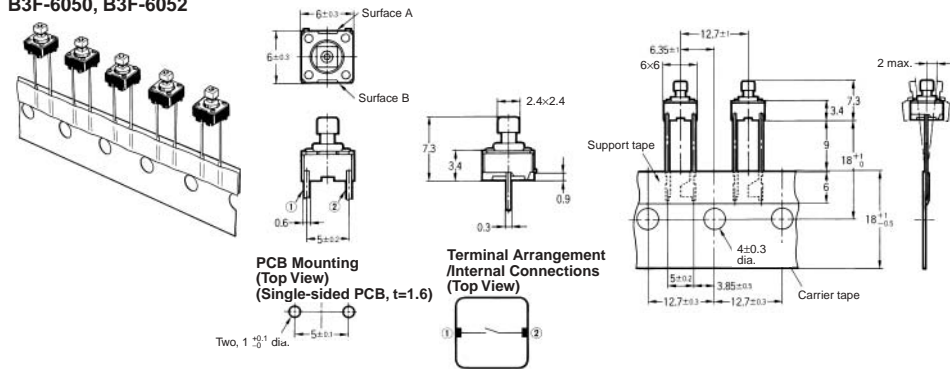

Note: The tape is random between surface A and surface B.

**Projected Plunger Type
(with Ground Terminal)**
B3F-6150, B3F-6152

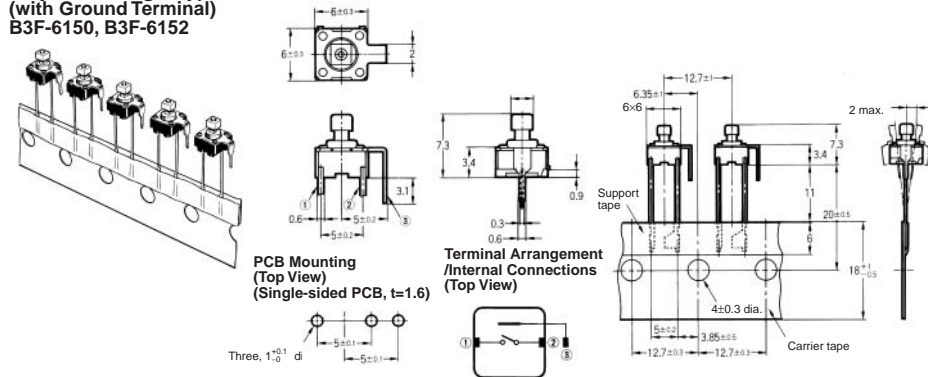


Key Tops





B32-series Special Key Tops are available for projected plunger models.

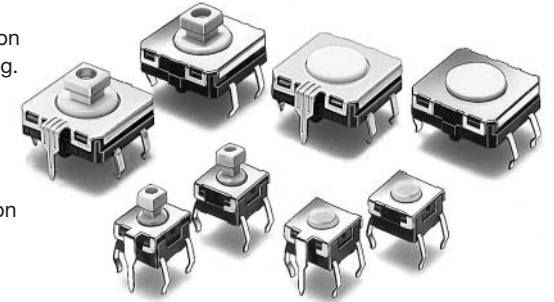Allows Cleaning After Soldering with Alcohol Solvents

- Internal sealed construction allows immersion cleaning with alcohol solvents after soldering.
- Thin, compact construction in both 12 x 12 mm and 6 x 6 mm sizes.
- Snap-action contact construction for a positive click action.
- Available with ground terminals for protection against static electricity.
- Sealed construction also provides high reliability in dusty environments.



Ordering Information


Type	Plunger	Height	Operating force (of)		Bags (100 Switches)	
			Without ground terminal	With ground terminal	Without ground terminal	With ground terminal
6 x 6 mm (B3W-1000)	Flat 	4.3 mm	Standard force	1.57 N (160 gf)	B3W-1000	B3W-1100
			High-force	2.25 N (230 gf)	B3W-1002	B3W-1102
	Projected 	7.3 mm	Standard force	1.57 N (160 gf)	B3W-1050	B3W-1150
			High-force	2.25 N (230 gf)	B3W-1052	B3W-1152
12 x 12 mm (B3W-4000)	Flat 	4.3 mm	Standard force	1.96 N (200 gf)	B3W-4000	B3W-4100
			High-force	3.43 N (350 gf)	B3W-4005	B3W-4105
	Projected 	7.3 mm	Standard force	1.96 N (200 gf)	B3W-4050	B3W-4150
			High-force	3.43 N (350 gf)	B3W-4055	B3W-4155

Note: Orders must be made in multiples of 100 (the quantity per bag).

Accessories (Order Separately)

Special Key Tops are available for projected Switch models.

Nomenclature

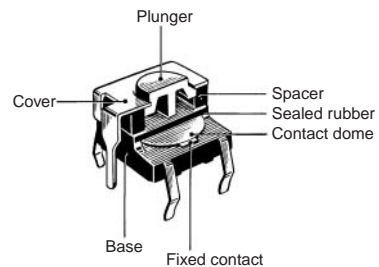

Specifications

■ Ratings/Characteristics

Switching capacity	1 to 50 mA, 5 to 24 VDC (resistive load)
Ambient temperature	-25°C to 70°C (with no icing)
Ambient humidity	35% to 85%
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² {approx. 100 G} max. Malfunction: 100 m/s ² {approx. 10 G} max.
Life expectancy	B3W-1000: 1.57 N (standard force):1,000,000 operations min. 2.26 N (high-force):300,000 operations min. B3W-4000: 1.96 N (standard force):3,000,000 operations min. 3.43 N (high-force):1,000,000 operations min.
Weight	6 x 6 mm: approx. 0.3 g, 12 x 12: approx. 1 g

■ Operating Characteristics

Item	B3W-1000		B3W-4000	
	1.57 N	2.26 N	1.96 N	3.43 N
Operating force (OF)	1.57 N {160 gf} max.	2.26 N {230 gf} max.	1.96 N {200 gf} max.	3.43 N {350 gf} max.
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.	0.29 N {30 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.25 ^{+0.2} / _{-0.1} mm		0.3 ^{+0.2} / _{-0.1} mm	



Note 1. All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Note 2. No terminal numbers are indicated on the Switches. The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram below. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up. (Bottom View)


■ 6 x 6 mm Models

Flat Plunger Type (without Ground Terminal)


B3W-1000
B3W-1002



PCB Mounting (Top View) (Single-sided PCB, t=1.6)





Terminal Arrangement /Internal Connections (Top View)




Flat Plunger Type (with Ground Terminal)


B3W-1100
B3W-1102



PCB Mounting (Top View) (Single-sided PCB, t=1.6)





Terminal Arrangement /Internal Connections (Top View)




Projected Plunger Type (without Ground Terminal)


B3W-1050
B3W-1052



PCB Mounting (Top View) (Single-sided PCB, t=1.6)





Terminal Arrangement /Internal Connections (Top View)




Projected Plunger Type (with Ground Terminal)


B3W-1150
B3W-1152



PCB Mounting (Top View) (Single-sided PCB, t=1.6)




Terminal Arrangement /Internal Connections (Top View)




■ 12 x 12 mm Models


Flat Plunger Type
(without Ground Terminal)
B3W-4000
B3W-4005




Flat Plunger Type
(with Ground Terminal)
B3W-4100
B3W-4105

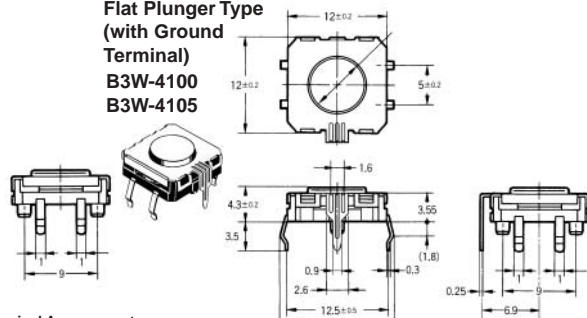


PCB Mounting (Top View)
(Single-sided PCB, t=1.6)




Terminal Arrangement
/Internal Connections
(Top View)




PCB Mounting (Top View)
(Single-sided PCB, t=1.6)




Terminal Arrangement
/Internal Connections
(Top View)




Projected Plunger
Type (without
Ground Terminal)
B3W-4050
B3W-4055

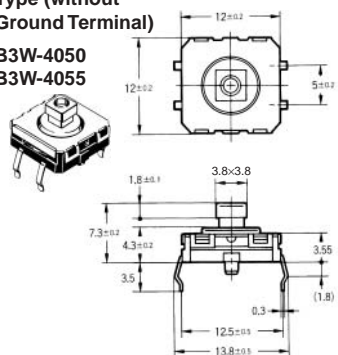


Projected Plunger
Type (with Ground
Terminal)
B3W-4150
B3W-4155

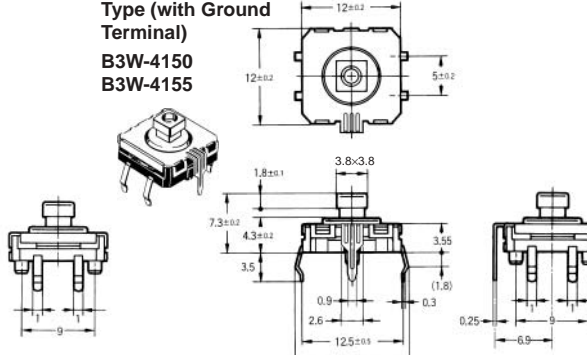


PCB Mounting (Top View)
(Single-sided PCB, t=1.6)




Terminal Arrangement
/Internal Connections
(Top View)



PCB Mounting (Top View)
(Single-sided PCB, t=1.6)



Terminal Arrangement
/Internal Connections
(Top View)




Key Tops

B32 series Special Key Tops are available for projected plunger models.




Surface-mounting Switches Ideal
for High-density Mounting

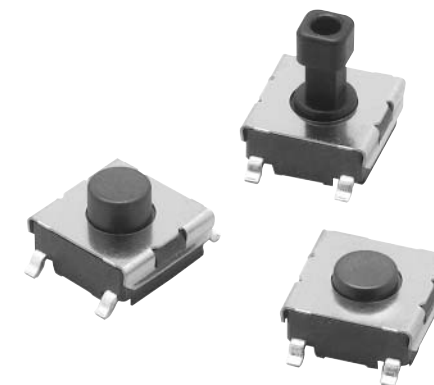- Tape packing style also available.
- Allows reflow soldering.
- Incorporates a snap-action contact mechanism that ensures sharp switching operations.



Ordering Information

■ List of Models

Type	Plunger	Height force (of)	Operating	Bag		Embossed tape	
				Model	Minimum order unit	Model	Minimum order unit
6 x 6 mm B3FS-1000 models	Flat 	3.1 mm	0.98 N {100 gf}	B3FS-1000	100	B3FS-1000P	3,000
				B3FS-1002		B3FS-1002P	
	Flat 	4.3 mm	0.98 N {100 gf}	B3FS-1010		B3FS-1010P	1,000
				B3FS-1012		B3FS-1012P	
	Projected 	7.3 mm	0.98 N {100 gf}	B3FS-1050 (See note.)	B3FS-1050P (See note.)		
				B3FS-1052 (See note.)	B3FS-1052P (See note.)		

Note: Orders must be made in multiples of the minimum order unit. Switches are not sold individually.


Specifications

■ Ratings/Characteristics

Switching capacity	50 mA, 24 VDC (resistive load)
Ambient temperature	Operating: -25°C to 70°C (with no icing)
Ambient humidity	Operating: 35% to 85%
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 100 VDC)
Dielectric strength	250 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) max. Malfunction: 100 m/s ² (approx. 10G) max.
Life expectancy	Standard models (0.98 N): 1,000,000 operations min. High-force models (1.47 N): 300,000 operations min.
Weight	B3F-1000: Approx. 0.2 g

Engineering Data

Operating Force vs. Stroke Characteristics
B3F-1000

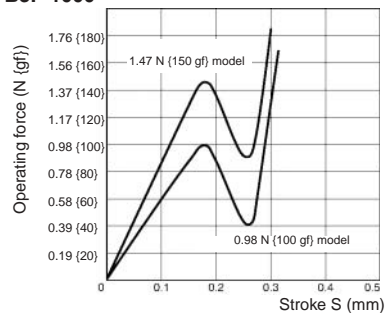

■ Operating Characteristics


Item	B3FS-1000	
	0.98 N	1.47 N
Operating force (OF)	0.98±0.29 N {100±30 gf}	1.47±0.49 N {150±50 gf}
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.25 ^{+0.2} / _{-0.1} mm	

Dimensions


Note: All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ±0.4mm applies to all dimensions.

Flat Type


B3FS-1000
B3FS-1002
B3FS-1000P
B3FS-1002P



PCB Pad
(Top View)
(One-side PCB t= 1.6)




Terminal Arrangement/
Internal Connection
(Top View)




Flat Type


B3FS-1010
B3FS-1012
B3FS-1010P
B3FS-1012P



PCB Pad
(Top View)
(One-side PCB t= 1.6)




Terminal Arrangement/
Internal Connection
(Top View)




Projected Type


B3FS-1050
B3FS-1052
B3FS-1050P
B3FS-1052P



PCB Pad
(Top View)
(One-side PCB t= 1.6)



Terminal Arrangement/
Internal Connection
(Top View)




Key Tops

B32-series Special Key Tops are available for projected plunger models.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Designed as Surface-mounting Device (SMD) Meeting High-density Mounting Requirements

- SMD Tactile Switch ideal for high-density mounting.
- Compact and more than 1 mm thinner than conventional tactile switches.
- Available with ground terminals for protection against static electricity.
- Sealed construction conforming to IP64 (IEC-529) provides high reliability in dusty or humid environments.

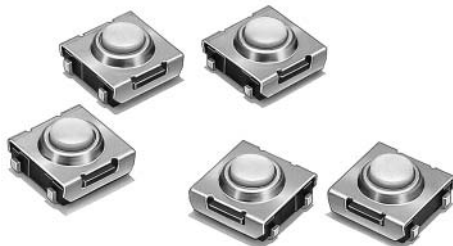

Ordering Information

■ List of Models

Type	Bags	Embossed tape (see note)
Without ground terminal	B3SN-3012	B3SN-3012P
With ground terminal	B3SN-3112	B3SN-3112P

Note: Switches in bags must be ordered in units of 100 pieces, and Switches on embossed tape must be ordered in units of 3,000 pieces

■ Operating Characteristics


Operating force (OF)	1.57±0.49 N {160±50 gf} max.
Releasing force (RF)	0.29 N {30 gf} min.
Pretravel (PT)	0.25±0.15 mm

Specifications

■ Ratings/Characteristics


Switching capacity	1 to 50 mA, 5 to 24 VDC (resistive load)
Ambient temperature	Operating: -25°C to 70°C (with no icing)
Ambient humidity	Operating: 35% to 85%
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	250 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² {approx. 100G} max.
Life expectancy	100,000 operations min.
Weight	Approx. 0.2 g

Nomenclature

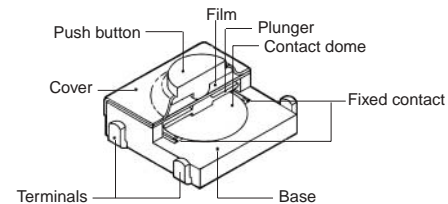


Dimensions


Note 1. All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

2. No terminal numbers are indicated on the Switches. The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram below. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up. 


Without Ground Terminal
B3SN-3012
B3SN-3012P




PCB Mounting (Top View)




Terminal Arrangement /Internal Connections (Top View)




With Ground Terminal
B3SN-3112
B3SN-3112P



PCB Mounting (Top View)



Terminal Arrangement /Internal Connections (Top View)



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Surface-mounting Tactile Switch for High-density Packaging

- Dust-sealed construction provides high reliability in locations exposed to dust.
- SMD Tactile Switch ideal for high-density mounting.
- Sealed construction conforming to IP64 (IEC-529). Can be washed after soldering.
- Ground terminal available to protect against static electricity.



Ordering Information

6 x 6 mm Type B3S-1000

Operating force (OF)		Height	Without ground terminal		With ground terminal	
			Bags (100 Switches)	Embossed tape (1,000 Switches)	Bags (100 Switches)	Embossed tape (1,000 Switches)
Standard-force	1.57 N {160 gf}	4.3 mm	B3S-1000	B3S-1000P	B3S-1100	B3S-1100P
High-force	2.25 N {230 gf}		B3S-1002	B3S-1002P	B3S-1102	B3S-1102P

Note: Switches in bags must be ordered in units of 100 Switches, and Switches on embossed tape must be ordered in units of 3,000 Switches.

Specifications

■ Ratings/Characteristics


Switching capacity	5 to 24 VDC, 1 to 50 mA (resistive load)
Insulation voltage	30 VDC
Ambient temperature	Operating: -25°C to 70°C (with no icing)
Ambient humidity	Operating: 35% to 85%
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² {approx. 100G} max. Malfunction: 100 m/s ² {approx. 10G} max.
Life expectancy	Standard force models (1.57 N): 500,000 operations min. High-force models (2.25 N): 300,000 operations min.
Weight	Approx. 0.3 g

■ Operating Characteristics


Item	B3S-1□00	B3S-1□02
Operating force (OF)	1.57 N {160 gf} max.	2.25 N {230 gf} max.
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	0.25 ^{+0.2} / _{-0.1} mm	

Nomenclature

Engineering Data

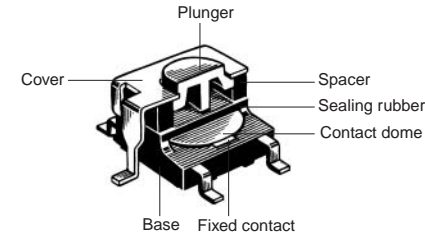

Operating Force vs. Stroke (Typical)

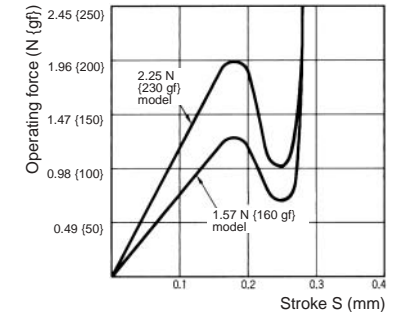


Dimensions


Note: All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Without Ground Terminal


B3S-1000
B3S-1002

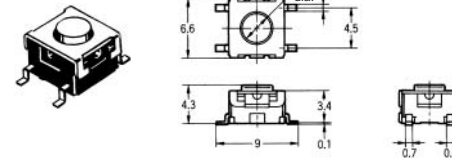

PCB Mounting (Top View)




Terminal Arrangement / Internal Connections (Top View)




With Ground Terminal


B3S-1100
B3S-1102

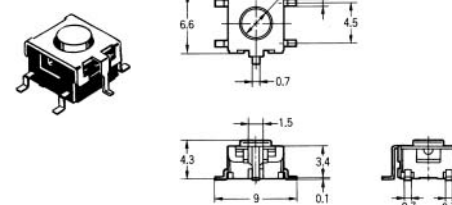

PCB Mounting (Top View)



Terminal Arrangement / Internal Connections (Top View)




ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.


To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Double-sealed Construction Ensures Watertight and Dust-tight Performance

- Sealed construction conforming to IP67 (IEC-529) provides high reliability in dusty or humid environments.
- As compact as 8 mm x 8 mm.
- Allows the use of radial-taping part insertion machines.

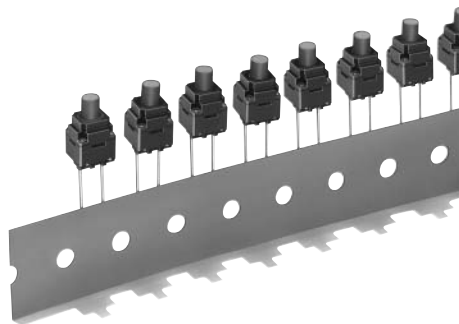

Ordering Information

Model	Height	Operating force (of)	Model without ground terminal	Minimum order unit
	13 mm	1.96 N {200 gf}	B3WN-6002(S)	1,000 Switches


Note: Orders must be made in multiples of the minimum order unit (multiples of 1,000). Switches are not sold individually.

Specifications

■ Ratings/Characteristics


Switching capacity	50 mA, 12 VDC (resistive load)
Ambient temperature	Operating: -25°C to 85°C (with no icing)
Ambient humidity	Operating: 35% to 85%
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (initial value) (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 100 VDC)
Dielectric strength	250 VAC, 50/60Hz for 1 min
Bounce time	10 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 784 m/s ² {approx. 80G} max. Malfunction: 100 m/s ² {approx. 10G} max.
Life expectancy	100,000 operations min.
Weight	Approx. 0.7 g

Nomenclature



Engineering Data


Operating Force vs. Stroke Characteristics B3WN-6002 (S)

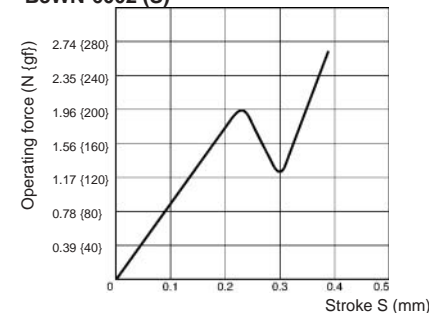

Dimensions

Note: All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

B3WN-6002 (S)

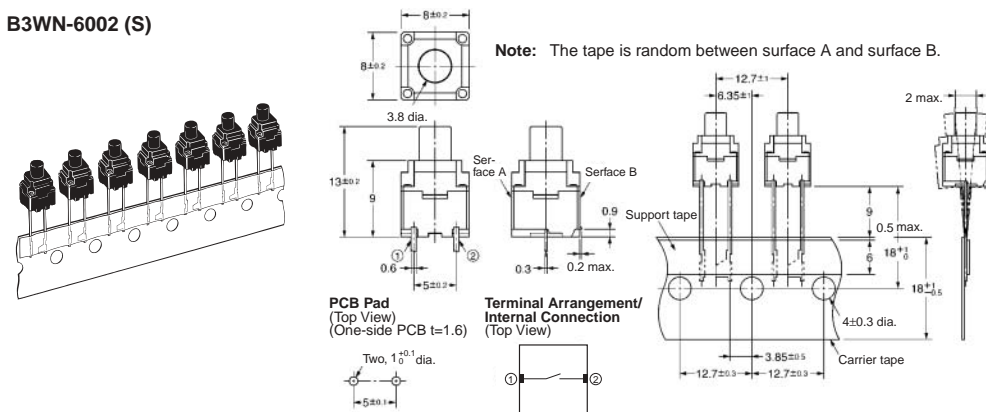

Note: The tape is random between surface A and surface B.

Note: Switch fixing direction (A and B) on the tape may change.


■ Operating Characteristics

Item	B3WN-6002 (S)
Operating force (OF)	1.96±0.67 N {200±70 gf}
Releasing force (RF)	0.49 N {50 gf} min.
Pretravel (PT)	0.3 ^{+0.2/-0.1} mm

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Hinged Design Developed through Ergonomics

- Quick, superior snap action through hook-type hinge construction.
- Available with 1 or 2 LEDs or without LEDs.
- The hinge button is available in a wide variety of colors (five standard colors).

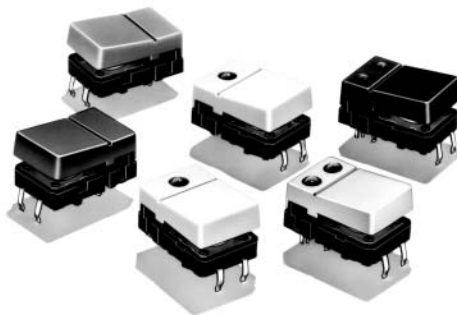

Ordering Information

Colour	No LED	One LED			Two LEDs (left and right)		
		Red	Yellow	Green	Red/Yellow	Red/Green	Yellow/Green
Light grey	B3J-1000	B3J-2000	B3J-3000	B3J-4000	B3J-5000	B3J-6000	B3J-7000
Black	B3J-1100	B3J-2100	B3J-3100	B3J-4100	B3J-5100	B3J-6100	B3J-7100
Orange	B3J-1200	B3J-2200	B3J-3200	B3J-4200	B3J-5200	B3J-6200	B3J-7200
Yellow	B3J-1300	B3J-2300	B3J-3300	B3J-4300	B3J-5300	B3J-6300	B3J-7300
Blue	B3J-1400	B3J-2400	B3J-3400	B3J-4400	B3J-5400	B3J-6400	B3J-7400

Specifications

■ Ratings/Characteristics

Switching capacity	1 to 50 mA, 5 to 24 VDC (resistive load)
Ambient temperature	-25°C to 70°C (with no icing)
Ambient humidity	35% to 85%
Contact configuration	SPST-NO
Contact resistance	100 mΩ max. (rated: 1 mA, 5 VDC)
Insulation resistance	100 MΩ min. (at 250 VDC)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s ² (approx. 100G) max. Malfunction: 100 m/s ² (approx. 10G) max.
Life expectancy	3,000,000 operations min.
Weight	Approx. 1.5 to 1.7 g

■ Operating Characteristics

Operating force (OF)	1.27±0.49 N {130±50 gf}
Releasing force (RF)	0.29 N {30 gf} min.
Pretravel (PT)	0.3 ^{+0.2} / _{-0.1} mm


■ Built-in LED Performance

Item		Red	Yellow	Green
Forward voltage VF	Standard value (V)	2.0	2.0	2.1
Forward current IF	Standard value (mA)	20	20	20
Permissible loss P	Absolute maximum value (mW)	84	84	84
Reverse voltage VR	Absolute maximum value (V)	5	5	5

Note: Since the built-in LED does not contain any limiting resistors, externally connect limiting resistors within the limits shown in the above table.

Engineering Data


Operating Force vs. Stroke (Typical)

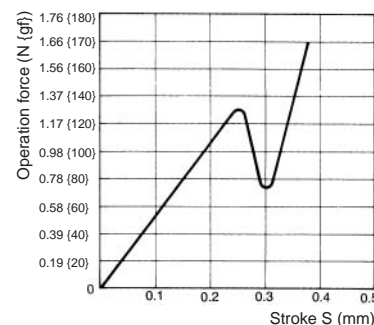


Dimensions

Note: All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.


Types with no LED
B3J-1□00




PCB Mounting (Top View)




Panel Cutout




Terminal Arrangement / Internal Connections (Top View)




1 LED Types
B3J-2□00, -3□00, -4□00




PCB Mounting (Top View)




Panel Cutout




Terminal Arrangement / Internal Connections (Top View)




2 LED Types
B3J-5□00, -6□00, -7□00




PCB Mounting (Top View)



Panel Cutout




Terminal Arrangement / Internal Connections (Top View)



ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Ultra-low Profile Dome Array with Dust-Proof Construction and Crisp Clicking Action

- No soldering required.
- Attach directly to PCB to make tactile switch.
- Matrix adhesive used to create highly dust-proof construction with good ventilation.
- Lower profile, lighter weight, and crisp clicking action achieved using stainless steel contact dome.
- OMRON's unique circular contact action ensures a high level of resistance to foreign matter.
- Can be designed and produced according to user specifications (e.g., external dimensions or key layout).

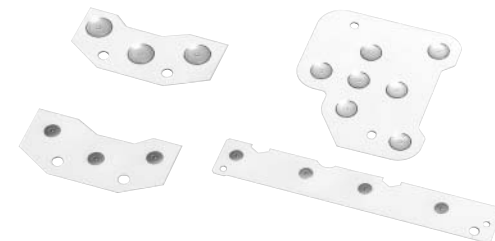



Structure

CIRCULAR CONTACT

When contact dome keys are attached to the PCB, any PCB dust or foreign particles will tend to collect in the center of the key when it is pressed. Therefore, poor contact occurs easily in keys that provide contact at the center point only. The circular contact construction provides contact along the circumference of a circle, thus preventing poor contact by avoiding the center point.

MATRIX ADHESIVE

This adhesive has grid-shaped slits for ventilation with the structure shown below. The height of the slits is 15 micrometers ensuring both ventilation and dust-proofing.

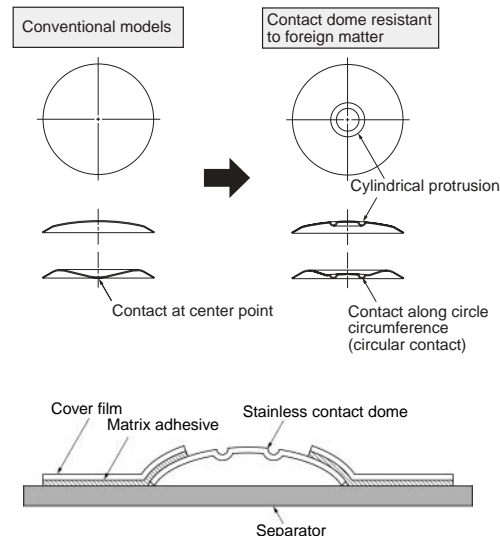


Specifications

Item	Specification
Diameter	4-mm dia. and 5-mm dia. models available
Operating force (OF)	1.57 ±0.49 N
Releasing force (RF)	0.2 N min.
Pretravel (PT)	0.2 ±0.1 mm
Thickness	0.25 ±0.1 mm
Life expectancy	4 mm dia.: 500,000 operations min. 5-mm dia.: 1,000,000 operations min.
Ambient operating temperature	-40 to 80°C
Ambient storage temperature	-40 to 85°C
Material	Stainless steel
Plating	Unplated, silver


Note: Contact dome specifications not shown in this table are also available.

Recommended Contact Form on PCB

4-mm Diameter Contact Dome

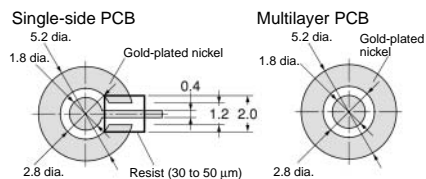

5-mm Diameter Contact Dome

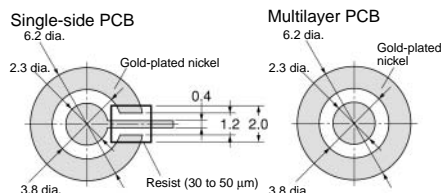

Precautions

CORRECT USE
ATTACHING TO THE PCB

Remove the Dome Array from the sheet using tweezers, and attach it above the contact on the PCB surface, which has been wiped clean in advance. Do not reuse a B3DA Dome Array that has been detached from the PCB. Attach a new Dome Array to the PCB.

Do not touch the contact dome with bare hands, or with unclean gloves. Doing so may damage the contact dome, which is the part that comes in contact with the PCB.

REFLOW SOLDERING

The Dome Array cannot withstand heat from reflow soldering. Always perform reflow soldering before attaching the Dome Array to the PCB.

WASHING

Do not wash the Dome Array. The Dome Array is not water-resistant and must not be exposed to water or other liquids.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Single-key Type Added to Series of B3DA Ultra-low Profile Dome Arrays

- No soldering required.
- Attach directly to PCB to make an ultra-low profile tactile switch.
- Construction provides strong resistance to static electricity by having no soldered terminals.
- Matrix adhesive used to create highly dust-proof construction with good ventilation.
- Lower profile, lighter weight, and crisp clicking action achieved using stainless steel contact dome.
- OMRON's unique circular contact action ensures a high level of resistance to foreign matter.




NEW

Application Examples

Use Dome Keys for the operating parts on various electronic devices that require low-profile controls, as follows:

- Operating switches with few mounted parts above PCBs. (Example: Camera operating buttons)
- Small orders, where initial investment in Dome Arrays is not feasible. (Example: Trial applications, commercial equipment, etc.)
- Applications requiring a single key only. (Example: Reset buttons)

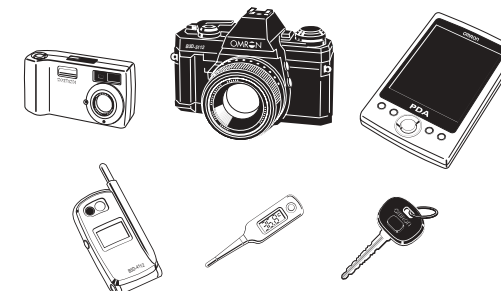


Specifications

Ratings/Characteristics

Item	Model	
	B3D-4112	B3D-5112
Diameter of contact dome	4-mm dia.	5-mm dia.
Operating force (OF)	1.67±0.49 N	
Releasing force (RF)	0.2 N min.	
Pretravel (PT)	0.2±0.1 mm	
Thickness	0.3±0.1 mm	
Life expectancy	500,000 operations min.	1,000,000 operations min.
Switching capacity	12 VDC, 10 mA (resistive load) (recommended minimum load: 3 VDC, 1 mA (resistive load))	
Ambient operating temperature	-40 to 80°C	
Ambient storage temperature	-40 to 85°C	
Contact dome	Stainless steel	
Plating	Silver	


Note: The Dome Keys are sold in units of 500 (20 sheets, with 25 Dome Keys per sheet). Orders must be made in multiples of 500 Dome Keys.

Structure

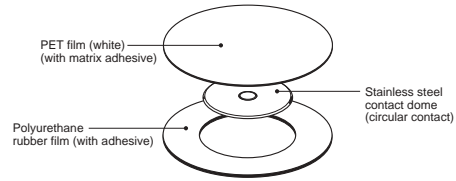

MATRIX ADHESIVE


The surface structure of this adhesive has grid-shaped slits, as shown in the following cross-sectional diagram. These slits provide both ventilation and dust-proofing, which is required for contact dome operation.



CIRCULAR CONTACT


When contact dome keys are attached to the PCB, any PCB dust or foreign particles will tend to collect in the centre of the key when it is pressed. Therefore, poor contact occurs easily in keys that provide contact at the centre point only.

The circular contact construction provides contact along the circumference of a circle, thus preventing poor contact by avoiding the centre point.

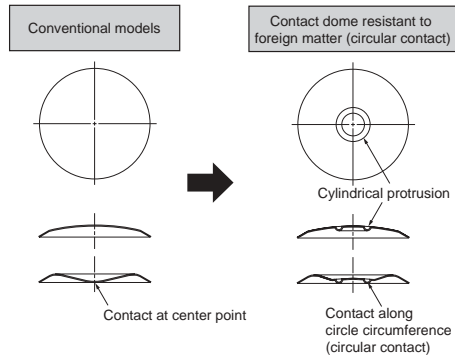


Recommended Contact Form

4 mm Diameter Contact Dome (B3D-4112)

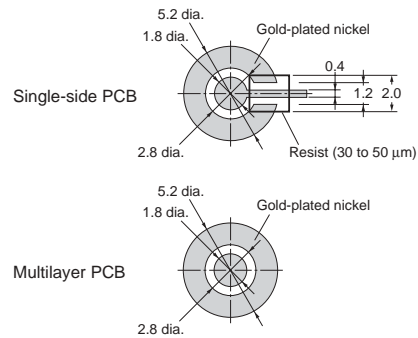


5 mm Diameter Contact Dome (B3D-5112)

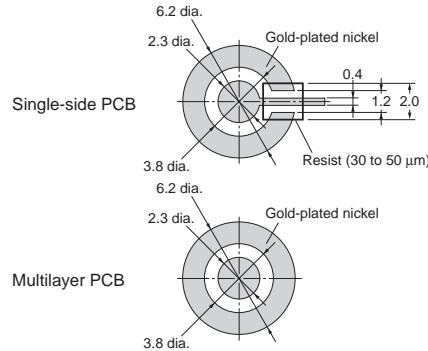


Recommended Operating Part Form

4 mm Diameter Contact Dome (B3D-4112)





5 mm Diameter Contact Dome (B3D-5112)





Dimensions

B3D-4112

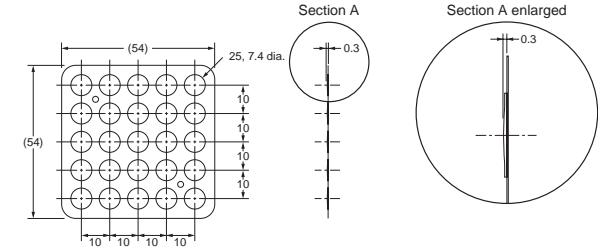

B3D-5112

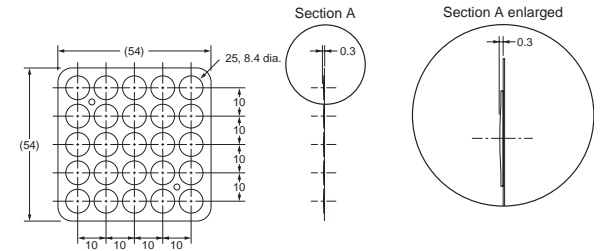

Precautions

CORRECT USE

ATTACHING TO THE PCB

Remove the Dome Key from the sheet using tweezers or a vacuum pick-up tool, and attach it above the contact on the PCB surface, which has been wiped clean in advance. Press down on the top surface using an elastic material, such as urethane rubber, and a force of 2.94 to 4.9 N. Place a positioning mark (circle) on the PCB for easy positioning.

Make sure that the position of the Dome Key is aligned correctly before use. Significant misalignment may result in short-circuits or reduced sensitivity.

Note: The recommended vacuum pick-up tool is the Hozen P-835 Vacuum Pick with an M suction pad (7-mm dia.).

Do not reuse a B3D Dome Key that has been detached from the PCB. Attach a new Dome Key to the PCB.

Do not touch the contact dome with bare hands, or with unclean gloves. Doing so may damage the contact dome, which is the part that comes in contact with the PCB.

REFLOW SOLDERING


The Dome Key cannot withstand heat from reflow soldering. Always perform reflow soldering before attaching the Dome Key to the PCB.

WASHING


Do not wash the Dome Key. The Dome Key is not water-resistant and must not be exposed to water or other liquids.

PCB Pattern Diagrams

B3D-4112

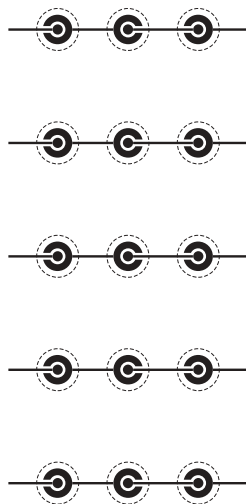


B3D-5112

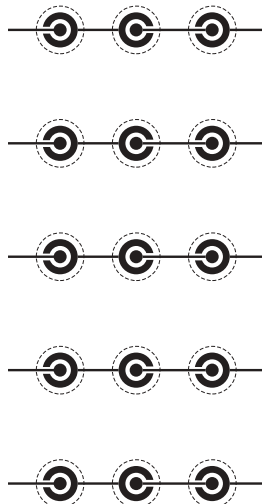

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Key Top Designed Specially for Projected-plunger-type B3F and B3W Switches

■ Available in a wide range of colors and sizes.

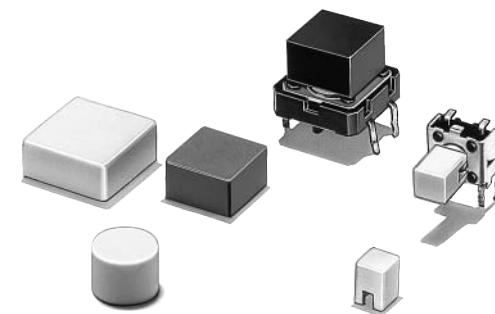

Ordering Information


For B3F and B3W Switches

Colour	6 x 6 mm Switches (B3F-1000, B3F-3000, B3F-6000, B3W-1000, B3FS)	12 x 12 mm Switches (B3F-4000, B3F-5000, B3W-4000)		12 x 12 mm Switches
	4 x 4 mm Key Top	9 x 9 mm Key Top	12 x 12 mm Key Top	9.5-mm dia.
Light grey	B32-1000	B32-1200	B32-1300	B32-1600
Black	B32-1010	B32-1210	B32-1310	B32-1610
Orange	B32-1020	B32-1220	B32-1320	B32-1620
Yellow	B32-1030	B32-1230	B32-1330	B32-1630
Blue	B32-1040	B32-1240	B32-1340	-
White	B32-1060	B32-1260	B32-1360	-


Dimensions

Note: All units are in millimeters unless otherwise indicated. Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.


B32-10□0

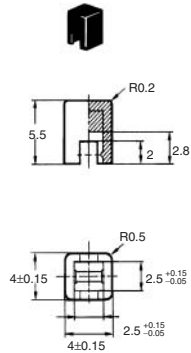


B32-12□0

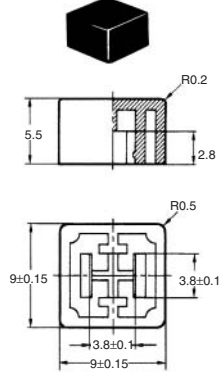


B32-13□0

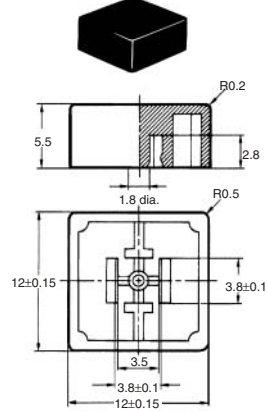


Panel Cutout




Panel Cutout



Panel Cutout



B32-16□0

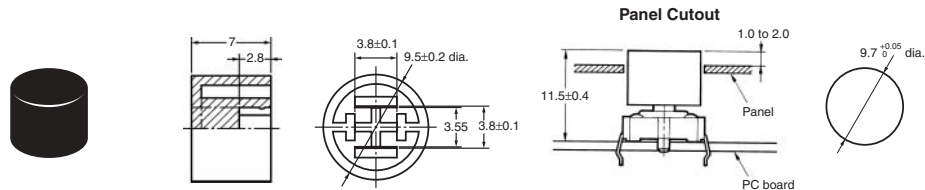

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Technical Information

The Photomicrosensor is a compact optical sensor that senses objects or object positions with an optical beam. The transmissive Photomicrosensor and reflective Photomicrosensor are typical Photomicrosensors.

The transmissive Photomicrosensor incorporates an emitter and a transmissive that face each other as shown in Figure 1. When an object is located in the sensing position between the emitter and the detector, the object intercepts the optical beam of the emitter, thus reducing the amount of optical energy reaching the detector.

The reflective Photomicrosensor incorporates an emitter and a detector as shown in Figure 2. When an object is located in the sensing area of the reflective Photomicrosensor, the object reflects the optical beam of the emitter, thus changing the amount of optical energy reaching the detector.

“Photomicrosensor” is an OMRON product name. Generally, the Photomicrosensor is called a photointerrupter.

Figure 1. Transmissive Photomicrosensor





Figure 2. Reflective Photomicrosensor



■ DataSheet

Absolute Maximum Ratings and Electrical and Optical Characteristics

The datasheets of Photomicrosensors include the absolute maximum ratings and electrical and optical characteristics of the Photomicrosensors as well as the datasheets of transistors and ICs. It is necessary to understand the difference between the absolute maximum ratings and electrical and optical characteristics of various Photomicrosensors.

Absolute Maximum Ratings

The absolute maximum ratings of Photomicrosensors and other products with semiconductors specify the permissible operating voltage, current, temperature, and power limits of these products.

The products must be operated absolutely within these limits.

Therefore, when using any Photomicrosensor, do not ignore the absolute maximum ratings of the Photomicrosensor, otherwise the Photomicrosensor will not operate precisely. Furthermore, the Photomicrosensor may be deteriorate or become damaged, in which case OMRON will not be responsible.

Practically, Photomicrosensors should be used so that there will be some margin between their absolute maximum ratings and actual operating conditions.

Electrical and Optical Characteristics

The electrical and optical characteristics of Photomicrosensors indicate the performance of Photomicrosensors under certain conditions.

Most items of the electrical and optical characteristics are indicated by maximum or minimum values. OMRON usually sells Photomicrosensors with standard electrical and optical characteristics.

The electrical and optical characteristics of Photomicrosensors sold to customers may be changed upon request. All electrical and optical characteristic items of Photomicrosensors indicated by maximum or minimum values are checked and those of the Photomicrosensors indicated by typical values are regularly checked before shipping so that OMRON can guarantee the performance of the Photomicrosensors.

In short, the absolute maximum ratings indicate the permissible operating limits of the Photomicrosensors and the electrical and optical characteristics indicate the maximum performance of the Photomicrosensors.